



**AgEcon** SEARCH  
RESEARCH IN AGRICULTURAL & APPLIED ECONOMICS

*The World's Largest Open Access Agricultural & Applied Economics Digital Library*

**This document is discoverable and free to researchers across the globe due to the work of AgEcon Search.**

**Help ensure our sustainability.**

Give to AgEcon Search

AgEcon Search

<http://ageconsearch.umn.edu>

[aesearch@umn.edu](mailto:aesearch@umn.edu)

*Papers downloaded from **AgEcon Search** may be used for non-commercial purposes and personal study only. No other use, including posting to another Internet site, is permitted without permission from the copyright owner (not AgEcon Search), or as allowed under the provisions of Fair Use, U.S. Copyright Act, Title 17 U.S.C.*



**Sociedad Caribeña de Cultivos Alimenticios  
36 Memoria Anual**

**Caribbean Food Crops Society  
36 Annual Meeting**

**Société Caraïbe des Plantes Alimentaires  
36 Mémoire Annuel**

**Boca Chica, Santo Domingo, República Dominicana  
27 de agosto al 1 de septiembre, 2000**

**Memoria Editada**

**por**

**Centro Para el Desarrollo Agropecuario y Forestal, Inc  
(CEDAF)**

---

---

## MODIFIED COFFEE DRYING SYSTEM

*L. R. Pérez-Alegría<sup>1</sup> and H. J. Ciro-Velásquez<sup>2</sup>. <sup>1</sup>MEMBER ASAE. <sup>2</sup>Professor of Agricultural & Biosystems Engineering Department and former Graduate Student of Mechanical Engineering Department, University of Puerto Rico, Mayaguez Campus.*

### ABSTRACT

The Bakker Arkema model for grain drying in deep bed was modified to simulate the process of coffee drying in deep beds using the heat and mass transfer model for thin layers proposed by Sokhansanj and Bruce (1987) and adapted for parchment coffee by Abud (1998).

A prototype of the drying bin was built and tested in the Agricultural Experimental Station in Adjuntas, Puerto Rico. This unit was used for validation of the mathematical model. The model predicts with a maximum deviation of 3% (wb) the moisture level of the bean throughout the drying process. The airflow direction was reversed in the prototype every six-hour intervals and air temperature was set at 55°C. Twenty-seven hours was needed to reach a moisture level of 11 w.b in the prototype using a flow rate of 50 cfm per square feet. A Comparison between experimental and theoretical values show a maximum deviation of 3% w.b.

**Key Words:** Coffee, Drying, Deep Bed, Reversal, Modeling, Simulation.

### INTRODUCTION

Coffee grows in the tropics, countries in Central and South America, Africa and Asia possess high air humidity and an mean annual temperature of 20°C and above. Worldwide Coffee is considered the second most important merchandise.

Farmers take very good care of coffee trees to ensure high yields, which other wise can upset the cash flow of the farm and the availability of hand pickers during the harvest season. Hand pickers will rather work for yield farms where they can earn more money for their daily work. Coffee cherries are pulped and wash clean for the mucilaginous substance that surrounds the bean. This cleaning is done either by fermenting the sugars in the mucilage and then washing clean or by jetting water directly to the bean for physical removal of this sticky substance. Beans in the coffee cherry are wet, about 50-54% wet basis (wb) and after pulping and washing the bean gains moisture reaching 54 to 58%. Drying is therefore the next process, that under weather permitting conditions, small farmers do under the sun for several days. But in large commercial production scenarios, sun drying is not enough and artificial drying equipment has to be used. To maintain the same quality of sun dried coffee, the air temperature has to be kept at 55°C (references). Many of the substances that gives products such as coffee their typical flavor and aroma are volatile organic compounds, and would be lost in a normal drying process because they would evaporate together with water.

Farmers in Puerto Rico's coffee growing areas have used simple deep layer dryers equipped with diesel burners and electric fans. Wet parchment coffee is placed on a perforated plenum chamber where a heated air current removes water as it travels upward. A stirring mechanism stirs the coffee beans that are most adjacent to the perforated plenum chamber, but in the process this layer is overdried and most times the bean is physically damaged. In this paper, we present a mathematical formulation of the thermal processes in the deep layer coffee dryer. The system was modified to allow reversal air flow as the drying process takes place generating two drying fronts for improved quality of the end product. A prototype of the proposed alterations was built and evaluated using air flow reversal. To model the process we used the Bakker-Arkema model formulation with heat and mass transfer equations adapted from the thin layer grain drying theory.

## LITERATURE REVIEW

### Reversal Airflow Method and Drying Simulation.

Airflow reversal in coffee drying consists of alternating the direction of airflow through a steady layer of wet parchment coffee. In the process, coffee beans shrink and the porosity of the bed changes all throughout the process. The depth of the bed is also reduced from approximately 24-in to 18-in or less.

Air flow reversal in coffee drying has been investigated by several authors (Oliveros, 1984; Oliveros and Pinheiro, 1985; CENICAFE 1991; Alzate, 1992; Berbert et al. 1994 and 1995). Their results show better homogeneity of the dry product and a reduced moisture gradient is observed with airflow reversal. Sabbah et al. (1977 and 1979) and Dávila et al. (1983) concluded the same after drying soybean seed and rough rice, respectively.

Sabbah et al. (1979) simulated the process of deep bed drying using airflow reversal. They used a modified version of the model developed by Bakker-Arkema et al. (1974) to investigate the effect of drying conditions on the energy requirements of soybean seeds. The mean error (simulated versus observed) moisture content was 0.028 decimal with standard deviation of 0.014 decimal (dry basis).

Davila et al. 1983, also adapted the Bakker-Arkema model to simulate drying rough rice. The differences between experimental and predicted values of moisture content were found to be less than 1% on the average.

Oliveros and Pinheiro (1985) applied and validate the Thompson et al. (1968) model for parchment coffee with airflow reversal in deep beds. They compared simulated results using experimental data by Correa (1982); concluding that the simulated results over-predicted the experimental values. Berbert et al. (1995) also adapted this model for coffee obtaining regression coefficient of 0.95 and the mean standard error between moisture content was 0.020 decimal d.b.

## SIMULATION MODEL

### Deep bed Model:

The simulation model developed in this research is basically a modified version of the Michigan State model for deep bed cited by Brooker et al. (1992). The model is based on simultaneous heat and mass transfer applied on a differential volume located at an arbitrary location in the stationary bed.

The model formulation is describe with the following equations:

$$\text{for enthalpy of the air: (1)} \quad \frac{\partial T}{\partial X} = \left( \frac{-h_r A_G}{G_a C_a + G_a C_v W} \right) (T - \theta)$$

$$\text{for enthalpy of the grain: (2)} \quad \frac{\partial \theta}{\partial t} = \left( \frac{-h_r A_G}{\rho_p C_G + \rho_p C_a M} \right) (T - \theta) + \left( \frac{h_{LG} + C_v (T - \theta)}{\rho_p C_G + \rho_p C_a M} \right) \left( G_a \frac{\partial W}{\partial X} \right)$$

$$\text{for humidity of the air: (3)} \quad \frac{\partial W}{\partial X} = - \left( \frac{\rho_p}{G_a} \right) \frac{\partial M}{\partial T}$$

The equation (4) is given by thin layer equation using either the theoretical formulation proposed by Sokhansanj and Bruce (1987), or the empirical relationship of Roa and Macedo (1976):

**Thin layer equation**

a) Theoretical equation:

The thin layer formulation is the basis for the deep bed model. In this research we used the model proposed by Sokhansanj and Bruce (1987) and adapted for coffee drying by Abud (1998). The thin layer formulation is:

for temperature of grain: (4)  $\rho_k C_G \frac{\partial \theta}{\partial t} = \text{div}(k_G \text{grad} \theta)$

for moisture of grain: (5)  $\frac{\partial M}{\partial t} = \text{div}(D_G \text{grad} M)$

Boundary conditions for equations 4 and 5 are: when (r=R<sub>e</sub>), then:

for temperature of the grain: (6)  $-k \frac{\partial \theta}{\partial r} = h_r (\theta - T) - \rho [h_{LG} + c_v (T - \theta)] h_m (M - M_E)$

for the moisture content of the grain: (7)  $-D \frac{\partial M}{\partial r} = h_m (M - M_{EQ})$

b) Empirical equation

We also considered the empirical equations developed by Roa and Macedo (1976) for thin layer drying. The equation relates moisture content to air vapor pressure using the following expression: (8)

$$\frac{\partial M}{\partial t} = -m q (M - M_{EQ}) (P_{vs} - (1 - HR))^n t^{q-1}$$

where the values for the constants m, q, n depend on the air temperature and are given by Ospina and López (1990) for parchment coffee.

An analytical solution of equations (1) to (8) was developed using a combination of explicit and implicit differential scheme. The resulting expansion was programmed along with the mathematical expressions that account for the physical-thermal properties of wet parchment coffee.

**PROCEDURES**

The prototype used for validation of the model is circular dryer with 1.22 m circumference (Figure 1). Air ducts are 10 in diameter with damper gates to control flow direction. Trials were conducted with Coffee Arabica L., variety Caturra. Approximately 272.75 kg of fresh wet parchment coffee was used in each trial. After loading, the prototype was instrumented with T-type thermocouples, pitot tubes, differential manometers and hygrometers and connected to a data acquisition system supplied by Campbell Scientific.

Interstitial air temperature was recorded using variable length thermocouples arrayed on a 120° on the circumference. These temperatures were recorded in four layers separated 11 cm from the perforated plenum. The temperature and relative humidity of the inlet hot air was measured in the discharge duct of the blower.

The hot air temperature was controlled with thermostats. Coffee samples were taken before inverting the air flow using a grain sampler to determine moisture content and grain temperature. Coffee samples were labeled, stored and refrigerated at 5°C for further processing at the laboratory. Moisture content was determined following standard specification by ASAE (1996). Every sampling time produced four samples, one for each position in the coffee layer. Overall moisture content was estimated by average of the samples and the resulting value was used for validation of the model outcomes. The airflow for each test was obtained applying the continuity equation in the outlet duct where the air velocity was measured with digital anemometer. Goodness of fit between the simulated results and observed data was calculated by the standard deviation and the coefficient of determination.


## RESULTS

Table 1 shows the drying conditions under airflow reversal and the final moisture content for the three experiments performed in Adjuntas, Puerto Rico. Airflow was regulated at 15.24 m<sup>3</sup>/m<sup>2</sup>\*min comparable to other authors that use 10 m<sup>3</sup>/m<sup>2</sup>\*min (Cenicafé) for deep bed equal or greater than 0.40 m.

**Table 1. Operating conditions for coffee drying with airflow reversal.**

Test Number	Drying Time (h)	Reversal Time (h)	Air Temperature (C)	Unit Flow (m <sup>3</sup> /m <sup>2</sup> *min)	AirFlow (m <sup>3</sup> /h)	Final moisture %, w.b.
1	24,0	3,0	54,69	15,24	1067,5	12,58
2	24,0	6,0	54,78	10,00	700,47	14,95
3	24,0	6,0	54,63	15,24	1067,5	12,59

The end moisture content of 11% was not reached because the drying time was set at 24 hours and, in the three trials, this time was not enough to reach the target moisture content. The ANOVA did not find statistical significant differences of the moisture content when using the air temperature as the independent variable. Also for the same reversal time interval, an increase of airflow let reduce the mean moisture content across of the coffee bed. Increasing the airflow by 52.4% can further reduce the moisture content by 18%. Increase the air temperature above 55°C is not recommendable because detrimental results in terms of coffee quality (aroma and flavor). The value of the inlet air temperature for each test is the average given throughout the process.

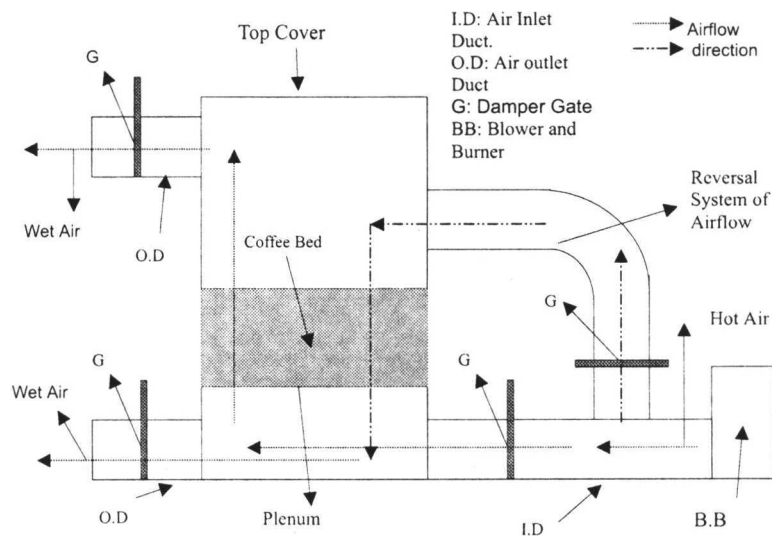

**Figure 1. Deep Bed Dryer for coffee drying with airflow Reversal.**

Figure 2, 3 and 4 shows the mean grain moisture content predicted by the two modeling approaches described before using the thin layer formulation of Roa and Macedo (1976), and the theoretical formulation of Sokhansanj and Bruce (1987).

The empirical model proposed by Roa and Macedo (1976) over predicted grain moisture in the early 18-hours of the test, the difference between observed and simulated is reduced in the late stages of the drying process. The theoretical approach based on the formulation by Sokhansanj and Bruce (1987); here the model tends to match the observed moisture content at the beginning of the test and slightly over predicts moisture content at the end of the test. Abud (1988) observed the same behavior working in thin layer with parchment coffee. This suggests that the Bakker-Arkema formulation can be used to model deep drying process using the thin layer theory described by Sokhansang and Bruce (1987).

Further analysis of the data shows that the standard deviation of the model with the empirical formulation was 6.89% (wb) moisture points above observed value, while that for the theoretical approach was only 2.82% (wb), showing a better fit with regard to the experimental data for all trials. The same behavior was observed throughout the drying test. The least square regression analysis of experimental and simulated moisture contents (theoretical formulation) reported coefficients of determinations of 0.94 to 0.96, respectively. However the deep bed model with empirical formulation for thin layer reached coefficients of determination from 0.89-0.92. The error in the empirical modeling approach is possibly due to the selection of values for the constant parameters in the mathematical expression relating vapor pressure deficit and the drying time. Moreover, the values used in this experiment were developed for parchment coffee grown elsewhere and not the one used in the trials.

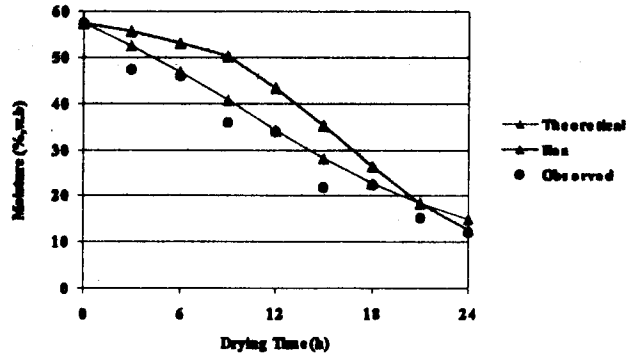


Figure 2: Observed versus simulated grain moisture content for test #1.

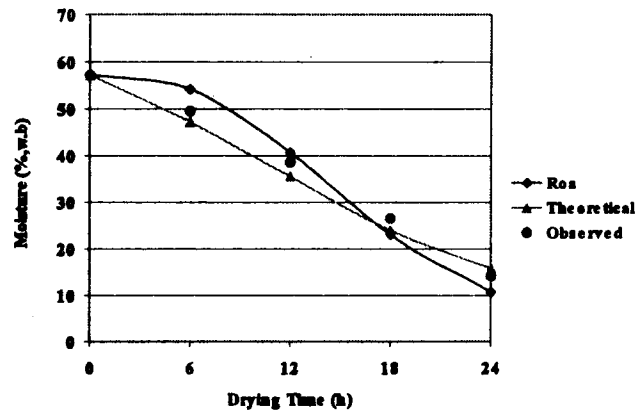


Figure 3: Observed versus simulated grain moisture contents for test #2.

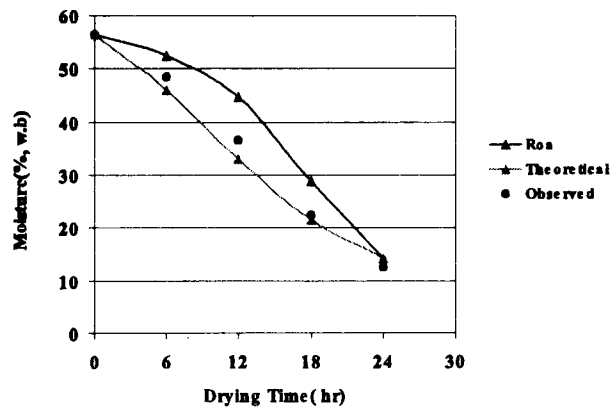


Figure 4: Observed versus simulated grain moisture content for test #3.

Another important observation from the experiments reported here is the high sensitivity of the mass transfer coefficient used in the theoretical modeling approach which is seen in Figure 5. A slight increment in the mass transfer coefficient tends to increase the rate of mass transport and therefore predicting lower moisture contents for the same drying time. This mass transfer coefficient, although a small number, has a profound effect on the model's outcomes. The optimum value of this mass transfer coefficient was  $0.45 \cdot 10^{-7}$  m/s for the temperature range and the air flow values used in this investigation. This value is within the range of acceptable values found by Abud (1998) for coffee drying simulations in thin layers. This value of  $h_m$  is approximately 4 times higher than the corresponding value found by Sokhansanj and Bruce (1989) for oatmeal grains.

#### Interstitial air temperature

Figures 6 and 7 show simulated and observed interstitial air temperatures for trials 2 and 3. The simulation model using the theoretical formulation of Sokhansanj and Bruce (1989) tends to over predict air temperature throughout the drying process. However, the empirical formulation of Roa and Macedo (1976) does a better job predicting interstitial air temperature in the drying bed. The overall standard deviation of using the empirical approach was  $5.65 \text{ }^\circ\text{C}$ , while the theoretical approach was  $7.92 \text{ }^\circ\text{C}$ . The empirical model better predicts temperature while the theoretical model does a better job predicting grain moisture content.

#### CONCLUSIONS

The following conclusion can be obtained from this study:

For modeling the drying process in coffee with airflow reversal, the version modified of the model developed by Bakker-Arkema et al. (1974) for deep bed

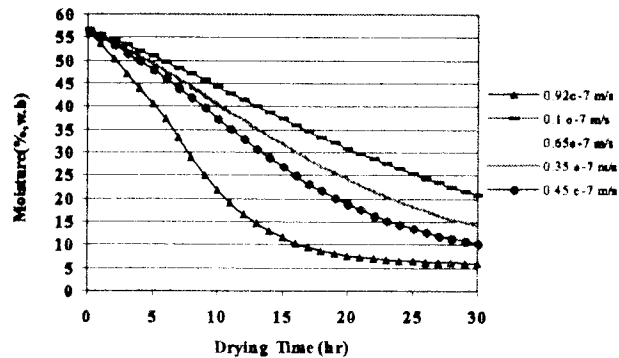


Figure 5: Sensitivity of the mass transfer coefficient  $h_m$  in coffee drying simulations in deep bed.

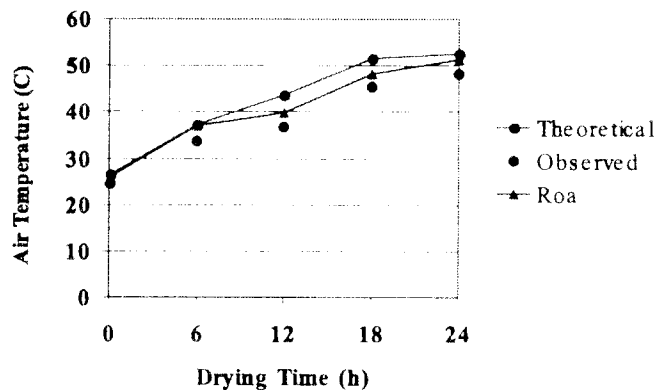


Figure 6: Observed versus simulated interstitial air temperatures for test 3.

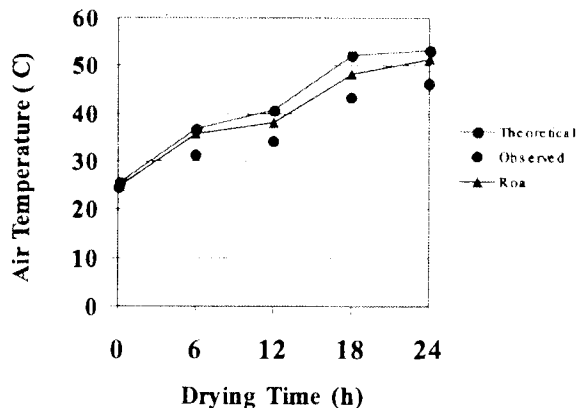


Figure 7: Observed versus simulated interstitial air temperatures for test 2.



dryer is successfully predict the variation of the moisture content.

The deep bed model using the thin layer model developed by Sokhansanj and Bruce (1987) and adapted for parchment coffee drying by Abud (1998) provide good prediction of observed mean moisture content profiles.

Using the deep bed models the choice of the value of the mass transfer coefficient can significantly affect the results derived of the simulations.

The model in deep bed proposed by Bakker Arkema et al (1974) over predicts the mean air temperature inside coffee grain bed. Predictions of temperatures profile were no good, particularly in the stages intermediates of drying process.

The choice of the thin layer model significantly affects the results given by the simulation model in deep bed.

**APPENDIX A. PHYSICAL, THERMAL AND HYGROSCOPIC PROPERTIES OF THE WET PARCHMENT COFFEE USED IN THIS SIMULATION STUDY.**

**Physical Properties:**

a. Equivalent Radii

$$R_e = 3.94 \cdot 10^{-3} \text{ m} \quad (\text{Ciro 2000})$$

b. Specific Area

$$A_G = 763.01 \text{ m}^2/\text{m}^3 \quad (\text{Ciro 2000})$$

c. Kernel density

$$\rho_k = 703.48 + 230.3 M_{dec \text{ w.b}} \quad (\text{Abud,1998})$$

d. Bulk Density

$$\rho_p = 282.4 + 5.993 M_{\% \text{ w.b}} \quad (\text{Ciro, 2000})$$

**Thermal Properties**

**Bulk Specific Heat**

$$C_G = 1.6552 + 0.05835 M_{\% \text{ w.b.}} \quad (\text{Ciro,2000})$$

**Bulk Thermal Conductivity**

$$k_G = 0.00830 + 0.02363 M_{dec \text{ w.b}} \quad (\text{Abud,1998})$$

**Hygroscopic Properties**

Latent Heat of Evaporation (Trejos,1986)

Equilibrium Moisture Content (Trejos,1986)

where

and

$$D_G = 4.1582 \cdot 10^{-8} \text{ EXP}((0.1346 \_C + 2.2055)M_{dec.b} - 1148 (\_C + 273.16)^{-1})$$

( Montoya,1989)

## APPENDIX B. LIST OF SYMBOLS

- AG: Specific area of the grain, m<sup>2</sup>/m<sup>3</sup>
- c: Diffusion Coefficient of grain
- Ca: Specific heat of dry air, kJ/ kg K
- CG: Specific heat of parchment coffee grain, kJ/ kg K
- Cv: Specific heat of moist air, kJ/ kg K
- Cw: Specific heat of water, kJ/ kg K
- DG: Water diffusion coefficient of grain, m<sup>2</sup>/h
- Ga: Air flow rate, kg/h\*m<sup>2</sup>
- hLG: Latent heat of evaporation, kJ/kg
- hm: Mass transfer coefficient, m/s
- HR: Relative humidity, decimal
- ht: Heat transfer coefficient, W/m<sup>2</sup> K
- kG: Bulk thermal conductivity, W/m K
- M: Moisture content, decimal dry basis.
- ME: Equilibrium moisture content, dry basis (decimal)
- Pvs: Saturated vapor pressure, Kpa
- r: Radial coordinate, m
- RE: Equivalent radii of grain, m
- T: Air temperature, K.
- TC: Air Temperature of Drying, 0C.
- t: Drying time, h
- W: Humidity ratio, kg water/kg dry air
- X: Bed depth, m
- q: Grain temperature, K
- qC: Grain Temperature, 0C.
- r: Water density, kg/m<sup>3</sup>
- rp: Bulk density, kg/m<sup>3</sup>
- rk: kernel density, kg/m<sup>3</sup>

## References.

- American Society of Agricultural Engineers.1996. ASAE Standards 1996. Am. Soc.of Agric. Engng., Michigan
- Abud, L. C. 1998. Modelaje y Simulación de Café en Capa Delgada Usando el Método del Volumen de Control. M.Sc. Thesis. Universidad de Puerto Rico, Mayaguez, P. R., 122 pp.
- Alzate, A. Jose Gildardo. 1992. Optimización Operacional del Silo Secador Cenicafé. Tesis B.S. Universidad Nacional de Colombia, Medellin, 240p.
- Bakker-Arkema, F.W. et al.1974. Grain Drying Simulation. Research Report No 224, Michigan State University, E. Lansing.
- Berbert, P. A; Queiroz, D.M ;Silva, J.S y Pinheiro, Filho.1994. Drying of Coffe(Coffea Arabica L.) in a Fixed Bed with a Simulated Periodic Air Flow Reversal. J. Agric. Engng. Res.59(3): 195-202.
- Berbert, P. A; Queiroz, D.M ; Silva, J.S y Pinheiro, Filho.1995. Simulation of Coffee Drying in a Fixed Bed with Periodic Air Flow Reversal. J. Agric. Engng. Res.60(3): 167-173.
- Brooker,D. B; Bakker Arkema,F. W y Hall, C. 1992. Drying and Storage of Grains and Oilseeds. The AVI Publishing Company, INC. 265pp.

- 
- CENICAFE. 1991. Fundamentos del Beneficio de Café. Federación Nacional de Cafeteros de Colombia, Chinchiná, Colombia, 209pp.
- Ciro, V. H. J. 2000. Secado de Café con inversión Periódica de Flujo de Aire. M.Sc. Thesis. Universidad de Puerto Rico, Campus Mayaguez. Mayaguez, Puerto Rico, 87pp.
- Ciro, V. H. J. 1997. Estudio Dinámico de la Rama de Café para el Desarrollo de la Cosecha Mecánica por Vibración. Tesis B.S. Universidad Nacional de Colombia, Medellín, Colombia, 107 pp.
- Correa, P. C. 1982. Simulação de Secagem de Café em camada espessa. Tesis M.Sc. Universidad Federal de Viscosa, Viscosa, Brazil, 47pp.
- Dávila, S.I.; Chen, L.H. y Welch, G.B. 1983. Simulation Model for Reversing Direction Airflow Drying of Rough Rice. Transactions of the ASAE. 26(6): 1842-1848.
- Montoya, R. E. C. 1989. Optimización Operacional del Secador Intermitente de Flujos Concurrentes para Café Pergamino. Tesis M.S. Universidad Tecnológica de Pereira, Pereira, Colombia, 116 pp.
- Oliveros, T. C.E y Pinheiro, F. J. B. 1985. Simulación de Secado de Café en Capa Fija con Inversión del Sentido de Flujo de Aire. Revista CENICAFE. 36(1): 3-21
- Ospina, M. and López, D. J.A. 1990. Ecuación de Capa Delgada. En: Federación Nacional de Colombia. Informe Anual Julio 1989-Junio 1990. Chinchiná, Colombia.
- Roa, G. and Macedo, I.C. 1976. Grain Drying in Stationary Bins with Solar Heated Air. Solar Energy ( U.K). Pergamon Press. 18(?):445-449
- Sabbah, M.A.; Meyer, G.E; Keener, H.M y Roller, W. L. 1977. Reversed Direction Air Flow Drying For Soybean Seed. Transactions of the ASAE. 20(3):562-570.
- Sabbah, M.A.; Meyer, G.E; Keener, H.M y Roller, W. L. 1979. Simulation Studies of Reversed Direction Air Flow Drying Method for Soybean Seed in a Fixed Bed. Transactions of the ASAE. 22(3):1162-1166.
- Sokhansanj, S and Bruce, M. David. 1987. A conduction Model to Predict Grain Temperature in Grain Drying Simulation. Transactions of the ASAE. 30(4):1181-1184.
- Thompson, T. L; Peart, R.M. y Foster, G.H. 1968. Mathematical Simulation of Corn Drying a New Model. Transactions of the ASAE. 11(4):582-586.
- Trejos, R. R. 1986. Determinación de la Humedad de Equilibrio y del Calor Latente de Vaporización del Café Pergamino y Trillado. Universidad del Valle, Cali, Colombia, 153pp.