



The World's Largest Open Access Agricultural & Applied Economics Digital Library

This document is discoverable and free to researchers across the globe due to the work of AgEcon Search.

Help ensure our sustainability.

Give to AgEcon Search

AgEcon Search

<http://ageconsearch.umn.edu>

aesearch@umn.edu

*Papers downloaded from **AgEcon Search** may be used for non-commercial purposes and personal study only. No other use, including posting to another Internet site, is permitted without permission from the copyright owner (not AgEcon Search), or as allowed under the provisions of Fair Use, U.S. Copyright Act, Title 17 U.S.C.*

No endorsement of AgEcon Search or its fundraising activities by the author(s) of the following work or their employer(s) is intended or implied.

CONTROLLING SEDIMENT AND NUTRIENT LOSSES
FROM AGRICULTURAL LANDS

By

James J. Jacobs

September 1972

72-20

Controlling Sediment and Nutrient Losses
From Agricultural Lands

James J. Jacobs

Contents

Controlling Sediment and Nutrient Losses From Agricultural Lands	1
Next-Use Concept in Quality Determination	2
Pollutants from Agricultural Runoff and their Control	2
Development and Results of a Quality Management Model	4
Figure 1. The Physical System	6
Table 1. Programming Activities Allowed by Capability Class	7
Table 2. Opportunity Cost of Alternative Crop, Tillage and Land Practice Systems	8
Table 3. Linear Programming Results: Sediment Constraints With Three Delivery Ratios	12
Figure 2. Incremental Costs of Sediment Control	13
Table 4. Linear Programming Results: Sediment and Phosphorus Constraints with Three Delivery Ratios	14
References	

CONTROLLING SEDIMENT AND NUTRIENT LOSSES FROM AGRICULTURAL LANDS

By

James J. Jacobs

Quality of the environment is measured and evaluated by some criteria, such as composition, and by performance (1). However, quality, in terms of composition and/or performance, as a factor in environment has no meaning except as it relates to some use of the environment and scale of health, happiness and aspirations of man. For example, an environment is regarded as having a lower quality than 15 years ago because of an increase in the phosphorus contained in surface water and/or a change in the species of fish present in surface waters. In terms of performance, a particular environment (watershed) is not producing enough because the soil and phosphorus losses are twice the acceptable rate. Furthermore, the composition and performance of an environment are related. Measurement of the nitrogen and phosphorus content of waters helps to determine if a given water resource can be used (perform) in a particular way.

It is this ability to measure the content and performance of an environment that enables one to determine if there is a possible conflict between waste constituents (contents) and constituent requirements (performance) among uses of a particular resource. The conflicts between uses of a water resource are the result of three important and fundamental characteristics of the resource. These characteristics are: (1) the quality heterogeneity of water supplies; (2) the quality differentiation of demands by uses; and (3) the linkage between water uses.

The above characteristics can be explained by the ability of water to incorporate and transport, to some extent, everything it comes in contact with. Therefore, its every use whether natural, industrial or domestic has some effect on the constituent composition of a water supply. As a result, constituents and their levels will vary among water supplies. In turn, each user of a water supply desires different constituents in that supply or at least vary in their tolerance of a certain constituent. For example, dissolved oxygen is essential for a fish habitat but may be detrimental in cooling water because of increased corrosion associated with high oxygen levels (2). This suggests that "water quality" has no absolute definition but that quality of a water supply can only be measured by content as it relates to the uses (performance) to which it is to be put.

Next-Use Concept in Quality Determination

Water quality management may be regarded as a problem of determining the appropriate quality and means of obtaining that quality of a water supply in view of the differentiated quality desires of uses of that supply in a given location and time. Viewed in an economic context, a water supply is regarded as an economic resource only when it exhibits the characteristic of scarcity and thereby needs to be allocated among competing ends. Realizing that water supplies and demands are quality differentiated, economic scarcity can relate to quality of a water supply as well as physical quantity.

The existence of varying quality demands by water uses means that in an economic context, water quality is a relative rather than an absolute concept. This suggests that in defining pollution and establishing water quality levels there is a need to consider the next uses. Under the Next-Use Concept, degradation or pollution occurs when the effluent of the initial use adversely affects the next use to which the resource, i.e., water, is put in meeting the needs of man (3). Viewed in this manner, the waste constituents from one use may affect the quality of a water supply such that it increases the cost to or precludes the next use of that supply. This constitutes water pollution which is a problem of external diseconomies. This means the initial use of a water supply failed to consider the impact of its effluent so that additional costs must be borne by the next use to achieve the quality required for adequate performance by that use. If a conflict occurs between uses, an analysis reflecting both the costs and benefits of alternative levels of quality and methods of control should be undertaken. However, if the initial use has no adverse effect on the next uses, then there is no pollution and no need for establishing levels of water quality.

The next-use concept means that quality of a water supply will vary from area to area and from time to time depending on the uses of that supply. It can also be used in minimizing the costs of obtaining given quality levels, by expressing quality criteria (requirements) of uses in physical terms and regarding them as proxies for societal goals (4); thereby, treating them as constraints upon a cost minimization objective.

Pollutants from Agricultural Runoff and Their Control

The major purpose of agriculture is to manage part of the environment in producing the food and fiber demanded by mankind (5). Therefore, agricultural production and environmental research is not new. In the past, however, this research has concentrated on efforts to increase production and has largely ignored the effects of production on the environment. An example of this is a study by Duley (6) in 1926 which was concerned with runoff water as a means of depleting soil nutrients. Compare this with recent studies by Weider, et al (7) and Timmons, et al (8), which are concerned with nutrients from agricultural runoff as a factor in stream pollution.

The increased concern over the effect of agricultural production on the environment has resulted in society asking agriculture, as well as other segments, to reassess their goals and to incorporate into them their role in quality management. Thus, it appears that in the future agriculture will not only have to increase production but in doing so will be required to maintain minimum quality characteristics. Therefore, agriculture must move toward management systems that will maintain both high production and environmental quality (9).

While agriculture's potential in polluting our surface waters is recognized, little is known about agriculture's contribution to the water quality problem. This ignorance and potential of agriculture's role in water quality management arises primarily from the combination of: (1) agricultural production being scattered over most of the nation and (2) the rapid adoption of modern technologies with their residues and fallouts. Although some information is becoming available concerning agriculture's contribution to environmental quality, the important and difficult task remaining is that of relating its contribution to soil, climate, crop rotations, land practices, chemical and fertilizer use, and animal waste disposal practices (10).

However, when the sources of waste constituents entering surface watercourses are enumerated, agriculture is, with increased frequency, being listed as a major contributor. Sources of potential pollutants from agricultural production are (11):

1. Sediment from erosion
2. Plant nutrients
3. Livestock manure
4. Pesticides
5. Waste from processing plants
6. Air pollution, primarily odors and dusts.

Assuming a concern for achieving specified quality levels for constituents from agricultural runoff, any of the first four waste constituents above could have served as the focal point in this paper (12). However, sediment and phosphorus were the constituents selected for intensive study. These are likely candidates because of the magnitude of sediment as a pollutant, the increased emphasis on phosphorus as a likely key nutrient in limiting growth of aquatic plant life and the diffuse source of such pollutants from agricultural runoff as compared to point sources (i.e., processing plants, feedlots, etc.). Furthermore, what appears to be important in the influence of sediments on water quality, in addition to the physical damages, involves the phosphorus', as well as nitrogen and pesticides', adherence to the sediment and its relationship with the phosphorus in solution (13, 14).

To regard sediment and phosphorus from agricultural lands as pollutants requires a means of transporting these elements to the point of use and that they are in amounts sufficient to adversely affect other uses. Since runoff from agricultural land is capable of moving

constituents (in this case sediment and phosphorus) over time and space, the question which arises is: "How would different levels and mixes of agricultural inputs and practices affect important environmental variables of concern to society?"

Having designated sediment and phosphorus as the pollutants of prime concern in agricultural runoff, the rest of this paper is devoted to the presentation of the model and the results.

Development and Results of a Quality Management Model

Surface runoff from agricultural cropland is the primary transport agent of sediment entering surface waters. Therefore, planning for the control of sediment requires knowledge of the relations between those factors that cause loss of soil and those that help reduce such losses on cropland. Toward this end the "universal soil-loss equation" (15) was developed to provide specific guidelines needed to help select appropriate control practices for particular fields. In predicting these losses from individual fields, the equation takes into consideration rainfall, soil type, slope length and gradient, cropping practices and erosion-control practices. However, the estimation of sediment losses from a watershed is less reliable because the complex soils, land-use patterns and topography present problems in interpretation and factor evaluation that requires further research. By breaking the drainage area into a series of relatively homogenous land tracts, such as land capability classes by soil types, the erosion equation provides a methodical means of bringing the effects of rainfall, soils and land use into the computation of soil losses. An additional problem is that the above are gross estimates of the quantity of soil moved from its original position. Since the prime interest is in only that portion of sediment actually entering the watercourse, the initial sediment loss estimates must be adjusted for that portion deposited in sod waterways, fence rows, etc. To predict that portion delivered to the stream, a delivery ratio of .25 developed by Seay (3) is used. Delivery ratios of .20 and .30 are also used to check its sensitivity.

The "universal soil-loss equation" and "delivery ratio" will give estimates of sediment being delivered to the watercourse under different cropping and land practices but nothing similar to this exists for predicting phosphorus losses in agricultural runoff. However, a review of the literature did point out three important characteristics of phosphorus losses from agricultural cropland:

1. A positive relationship between soil and phosphorus losses (7, 16)
2. Phosphorus is readily absorbed by soil particles (17)
3. Erosion is selective in removing phosphorus (18)

Considering the above properties of phosphorus, estimates of phosphorous losses were obtained by applying the level of phosphorus in

the surface soil and an enrichment ratio 1/ to the sediment losses predicted by the soil loss equation and the delivery ratio. In this manner assuming a given stream flow, estimates of both sediment and phosphorus contributions to the stream were obtained for various cropping, tillage and erosion-control practices. 2/

For water use conflicts to result from the estimated sediment and phosphorus levels there must be a physical system linking the water uses. The physical linkage system of surface water pollution for the potential pollutants of sediment and phosphorus and the control methods is illustrated in Figure 1.

To operationalize the model of the physical system, several parts of the physical system are assumed to be constant. In the source section, rainfall, soil type, slope length, and slope gradient are assumed constant. In the stream carriage system, the delivery ratio, stream flow, and the transport of sediment and phosphorus are assumed constant. In the use section, quality and quantity levels are specified for the uses considered. These fixed factors relate primarily to relationships taken from the physical sciences and those which require simplifying assumptions. This leaves only soil conservation practices and water supply treatment as variables in the physical system, the justification being that both soil conservation practices and water supply treatment are important water quality management techniques.

In Table 1 the alternative methods allowed for controlling sediment and phosphorus losses by capability classes are presented. The question of which control methods and at what level depends on (1) the level of water quality desired; (2) the unit cost coefficients of alternative methods and (3) the technical coefficients of the alternative methods. A summary of the cost coefficients are presented in Table 2. Sediment and phosphorus coefficients were also estimated for each management system listed in Table 1 using the soil-loss equation and phosphorus enrichment ratio as explained above.

Having developed the cost and technical coefficients for each alternative control method, each method was regarded as an activity and a cost minimization model was cast in the following form:

-
- 1/ An enrichment ratio is the increase in the content of constituents in the eroded soil over that in the original surface soil.
 - 2/ For a more detailed discussion of the development of sediment and phosphorus coefficients under alternative practices see (5, Chapter 3 and 5).

Source of Waste

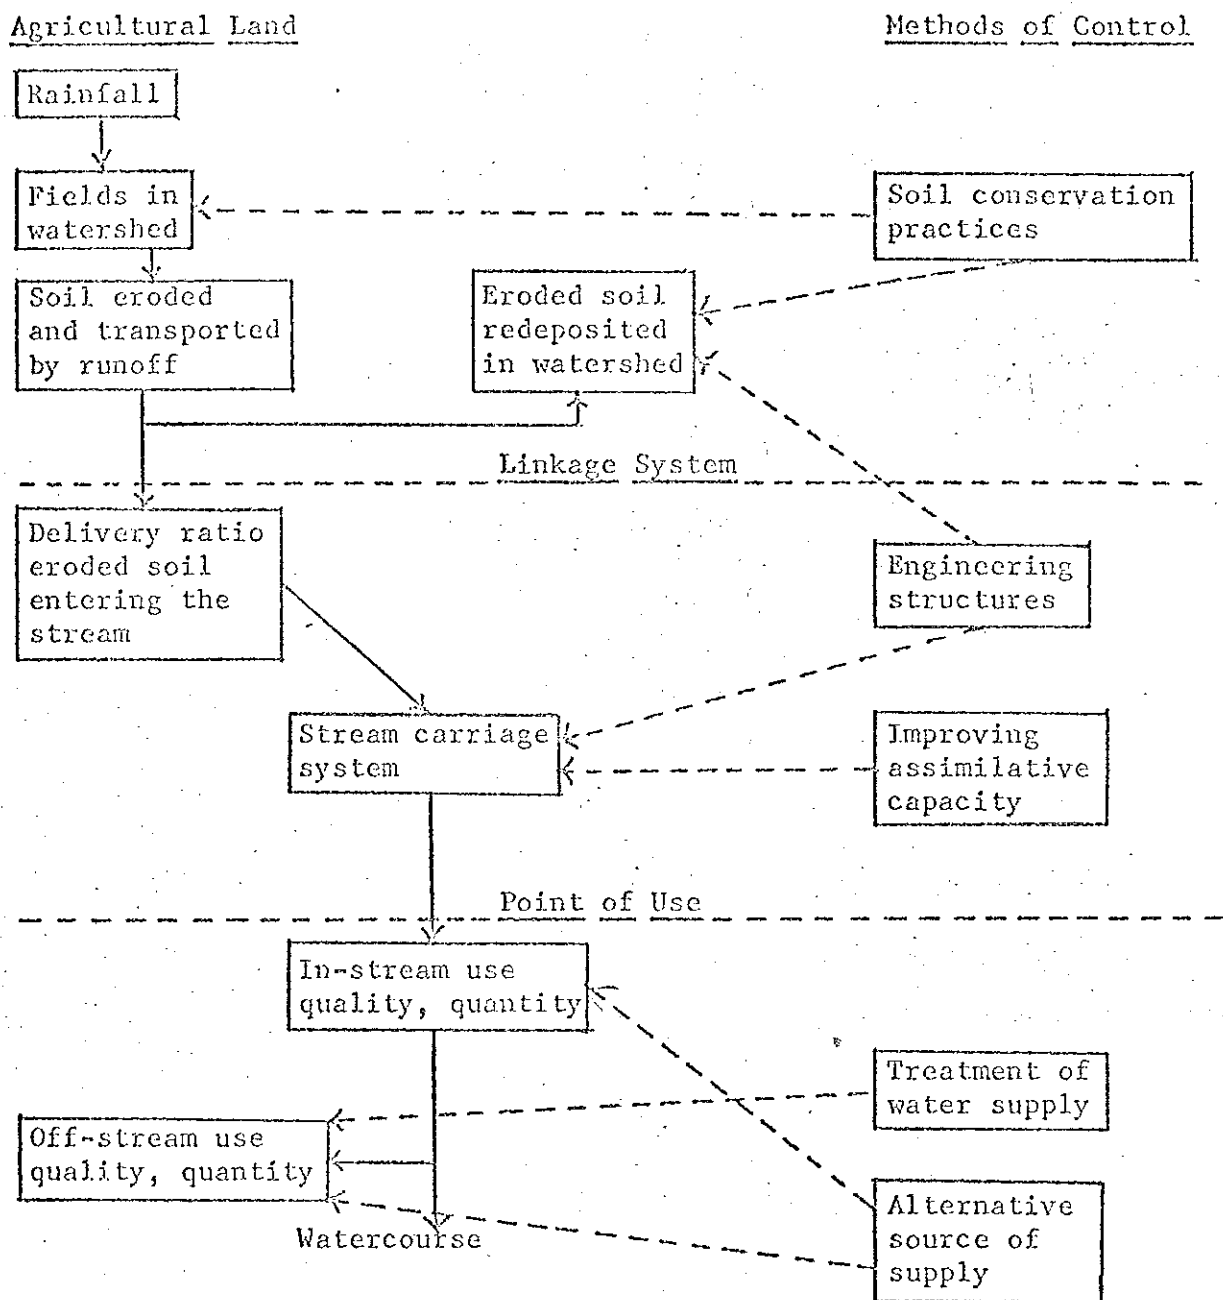


Figure 1 Diagrammatic presentation of physical linkage system for sediment and phosphorus from agricultural lands

Table 1
Programming Activities Allowed by Capability Class

Programming activities	Capability classes					
	I	II	III	IV	VI	VII
Conventional tillage:						
R ₁ ^a	X ^c	X	X	X		
R ₂ ^b	X	X	X	X		
R ₁ + contouring	X	X				
R ₂ + contouring	X	X				
R ₁ + terraces		X	X	X		
R ₂ + terraces		X	X	X		
Minimum tillage:						
R ₁ ^a	X	X	X	X		
R ₂ ^b	X	X	X	X		
R ₁ + contouring	X	X				
R ₂ + contouring	X	X				
R ₁ + terraces		X	X	X		
R ₂ + terraces		X	X	X		
Gully control structures		X	X	X	X	X
Permanent pasture	X	X	X	X	X	X

^aR₁ designates the corn-corn-soybeans rotation.

^bR₂ designates the corn-soybeans-corn-oats-meadow-meadow rotation.

^cX indicates those activities allowed in the various capability classes.

Table 2
Opportunity Cost of Alternative Crop,
Tillage and Land Practice Systems

Capability class	Management system	Production costs					Terrace cost (\$/ac)	Net return (\$/ac)	Opportunity cost (\$/ac)
		Gross revenue (\$/ac)	Machine and labor (\$/ac)	seed, chemical and fertilizer (\$/ac)	Land charge (\$/ac)				
I	Conv. till.-R ₁ ^{a/}	114.24	30.74	19.70	36.30	-	27.50	6.38	
	Conv. till.-R ₂ ^{b/}	90.21	28.50	13.37	36.30	-	12.04	21.84	
	Conv. till.+contour-R ₁	114.24	34.49	19.70	36.30	-	23.75	10.13	
	Conv. till.+contour-R ₂	90.21	32.39	13.37	36.30	-	8.15	25.73	
	Min. till.-R ₁	114.24	24.36	19.70	36.30	-	33.88	-	
	Min. till.-R ₂	90.21	24.35	15.58	36.30	-	13.98	19.90	
	Min. till.+contour-R ₁	114.24	26.87	19.70	36.30	-	31.37	2.51	
	Min. till.+contour-R ₂	90.21	27.50	15.58	36.30	-	10.83	23.05	
	Perm.past.	57.40	-	18.67	36.30	-	2.43	31.45	
II	Conv. till.-R ₁	109.74	30.74	19.70	33.48	-	25.82	6.38	
	Conv. till.-R ₂	87.08	28.50	13.37	33.48	-	11.73	20.47	
	Conv. till.+contour-R ₁	109.74	34.49	19.70	33.48	-	22.07	10.13	
	Conv. till.+contour-R ₂	87.08	32.39	13.37	33.48	-	7.84	24.36	

^{a/}R₁ Designates the corn-corn-soybeans rotation

^{b/}R₂ Designates the corn-soybeans-corn-oats-meadow-meadow rotation

Table 2 (Continued)

Capability class	Management system	Gross revenue (\$/ac)	Production costs			Land charge (\$/ac)	Terrace cost (\$/ac)	Net return (\$/ac)	Opportunity cost (\$/ac)
			Gross revenue (\$/ac)	Machine, seed, chemical and labor (\$/ac)	and fertilizer (\$/ac)				
II	Min. till.-R1	109.74	24.36	19.70	33.48	-	32.20 ^a	-	-
	Min. till.-R2	87.08	32.39	13.37	33.48	-	7.64	-	24.36
	Min. till.+contour-R1	109.74	26.87	19.70	33.48	-	29.69	-	2.51
	Min. till.+contour-R2	87.08	27.50	15.58	33.48	-	10.52	-	21.68
	Conv. till.+terrace-R1	109.74	30.74	19.70	33.48	7.40	18.42	-	13.78
	Conv. till.+terrace-R2	87.08	28.50	13.37	33.48	6.80	4.93	-	27.27
	Min. till.+terrace-R1	109.74	24.36	19.70	33.48	7.67	24.53	-	7.67
	Min. till.+terrace-R2	87.08	24.35	15.58	33.48	6.92	6.75	-	25.45
	Perm. past.	56.00	-	18.67	33.48	-	3.85	-	28.35
	Conv. till.-R1	96.38	34.49	19.70	24.80	-	17.39	-	7.62
III	Conv. till.-R2	76.38	32.39	13.37	24.80	-	5.82	-	19.19
	Min. till.-R1	96.38	26.87	19.70	24.80	-	25.01	-	-
	Min. till.-R2	76.38	27.50	15.58	24.80	-	8.50	-	16.51
	Conv. till.+terrace-R1	96.38	30.74	19.70	24.80	12.11	5.28	-	19.73
	Conv. till.+terrace-R2	76.38	24.36	19.70	24.80	13.11	14.41	-	10.60
	Min. till.+terrace-R1	96.38	24.36	19.70	24.80	13.11	14.41	-	10.60
	Min. till.+terrace-R2	76.38	-	-	-	-	-	-	-
	Perm. past.	49.00	-	18.67	24.80	-	5.53	-	19.48
	Conv. till.-R1	72.35	34.49	19.70	18.15	-	0.01	-	7.62
	Conv. till.-R2	57.14	32.39	13.37	18.15	-	-6.77	-	14.40
IV	Min. till.-R1	72.35	26.87	19.70	18.15	-	7.63	-	-
	Min. till.-R2	57.14	27.50	15.58	18.15	-	-4.09	-	11.72
	Conv. till.+terrace-R1	72.35	30.74	19.70	18.15	12.04	-8.28	-	15.91
	Conv. till.+terrace-R2	57.14	28.50	13.37	18.15	10.44	-13.32	-	20.95
	Min. till.+terrace-R1	72.35	24.36	19.70	18.15	13.85	-3.71	-	11.34
	Min. till.+terrace-R2	57.14	24.35	15.58	18.15	11.31	-12.25	-	19.88
	Perm. past.	39.00	-	18.67 ^e	18.15	-	2.18	-	5.45
	Perm. past.	30.00	-	18.67 ^e	10.09	-	1.24	-	-
	Perm. past.	27.00	-	18.67 ^e	6.05	-	2.28	-	-
	Gully								1171.21
VI	Perm. past.								
VII	Perm. past.								

$$\text{Minimize } Z = C_{11} X_{11} + C_{22} X_{22} + \dots + C_{nn} X_{nn}$$

$$\text{Subject to } a_{111} x_{11} + a_{122} x_{22} + \dots + a_{1nn} x_{nn} \leq b_1$$

$$a_{211} x_{11} + a_{222} x_{22} + \dots + a_{2nn} x_{nn} \leq b_2$$

$$a_{m11} x_{11} + a_{m22} x_{22} + \dots + a_{mnn} x_{nn} = b_m$$

In the above model, the combinations of land classes, soil conservation practices and gully control structures provides the bundle of alternative water quality improvement techniques, which is represented by the vector (X_j) , $j = 1, \dots, n$. In solving the model to obtain the minimum abatement cost and the corresponding treatment program, the following data are required:

a_{ij} , the amount of constituent m delivered to the stream from one acre of practice X_j .

b_m , the water quality level given in terms of the maximum concentration (mg/l) of a constituent allowed in the stream. Other constraints are the amount of land in the various land classes and the number of gully control structures allowed.

C_j , the cost in dollars for one acre of practice X_j . The model then determines a set of variables X_i , which are interpreted as the level of various soil conservation practices which minimizes the abatement costs for a given level of quality. In addition, by parametrically changing the constraints the incremental increase in the minimum cost per unit decrease in the amount of constituent m allowable can be obtained.

To illustrate application of the next-use concept to developing and costing water quality levels, the framework is applied to the Nishnabotna River Basin in southwestern Iowa. ^{3/} In applying the model, several sediment and phosphorus constraints were used, with the three most stringent sediment and phosphorus constraints based on municipal use, a warm water fish habitat and contact recreation, respectively. Having specified the coefficients and constraints the program was run initially to give solutions for various suspended sediment levels only and then with the phosphorus constraints added. These runs were made using three different delivery ratios and without "minimum tillage" activities in the final 6 runs. Solutions obtained in this manner made it possible to (1) derive total cost functions for the range of quality levels considered, (2) determine the impact of phosphorus constraints on total

^{3/} For a detailed description of this basin see (5, Chapter V).

cost and at what level it becomes the constraining value, (3) observe the different activities which are present in the optimal solutions, and (4) observe the changes in the shadow price of the quality constraints (marginal cost) over the range of quality levels considered. Furthermore, the use of three different delivery ratios provides a sensitivity analysis of the program to changes in a physical parameter while the runs without "minimum tillage" indicate the impact of neglecting a modern technology.

Upon observing all of the computer results, some general comments are possible. Land capability classes 1 and 2 were always in continuous row crops with terracing on class 2 land observed in only one of the solutions. Neither contouring nor the C-S-C-O-M-M rotation entered any of the optimal solutions. The phosphorus constraints added very little to the total cost of the sediment constraints, from 0 to just under 7 percent depending on the delivery ratio. Finally, the most stringent sediment and phosphorus quality levels were obtainable in all solutions.

A summary of the results for sediment constraints only are presented in Table 3. The results are illustrated in Figure 2 for the sediment constraints with a .25 delivery ratio. Referring to Figure 2, the program starts by pasturing class IV land, then builds gully control structures and is terracing class III land when meeting the most stringent sediment constraint, which is 37.5 mg/l.

A summary of the programming for the combined sediment and phosphorus constraints are presented in Table 4. The programming results indicate the following: (1) that the costs per acre are high but not unreasonable; (2) the most stringent constraints were obtainable; and (3) that a large portion of the agricultural land would remain in continuous row crops. While the sediment and phosphorus constraints were obtainable the question which remains and needs to be analyzed is: "Are the benefits sufficient to justify any level of control on sediment and phosphorus from cropland runoff?" A study by Frankel (19) and a report by Kneese and Bower (20) indicate that municipal and industrial costs are surprisingly insensitive to intake water quality. This suggests that decision of which level of water quality will rest either on a large reuse of the water and/or on aesthetic and recreational benefits.

Table 3
Linear Programming Results: Sediment Constraints
With Three Delivery Ratios

Sediment Objectives (mg/l)	Value of dual activity			Value of dual activity			Value of dual activity		
	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)	Value of objective function (total cost in million dollars)
10,000	0.30207	0.176	0.25078	0.11	0.543	0.21437	0.34		
9,000	0.30207	0.427	0.25078	.27	0.757	0.21437	.47		
8,000	0.56141	0.678	0.25078	.42	1.241	0.56141	.78		
7,000	0.56141	1.082	0.56141	.68	1.803	0.56141	1.13		
6,000	0.56141	1.643	0.56141	1.03	2.364	0.56141	1.48		
5,000	0.56141	2.205	0.56141	1.38	3.159	1.03073	1.97		
4,000	1.45365	2.903	1.20633	1.81	4.190	1.03073	2.62		
3,000	1.45365	4.110	1.20633	2.57	5.220	1.03073	3.26		
2,000	1.45365	5.316	1.20633	3.32	6.251	1.03073	3.91		
1,000	1.45365	6.522	1.20633	4.08	7.282	1.03073	4.55		
500	1.45365	7.125	1.20633	4.45	7.797	1.03073	4.87		
250	1.45365	7.427	1.20633	4.64	8.055	1.03073	5.03		
150	1.45365	7.548	1.20633	4.72	8.156	1.03073	5.10		
75	1.45365	7.638	1.20633	4.77	8.235	1.03073	5.15		
37.5	1.45365	7.638	1.20633	4.80	8.274	1.03073	5.17		

a/ This calculation is based on 1.6 million acres of crop and pasture land which accounts for about 89% of the land in the Nishnabotna River Basin.

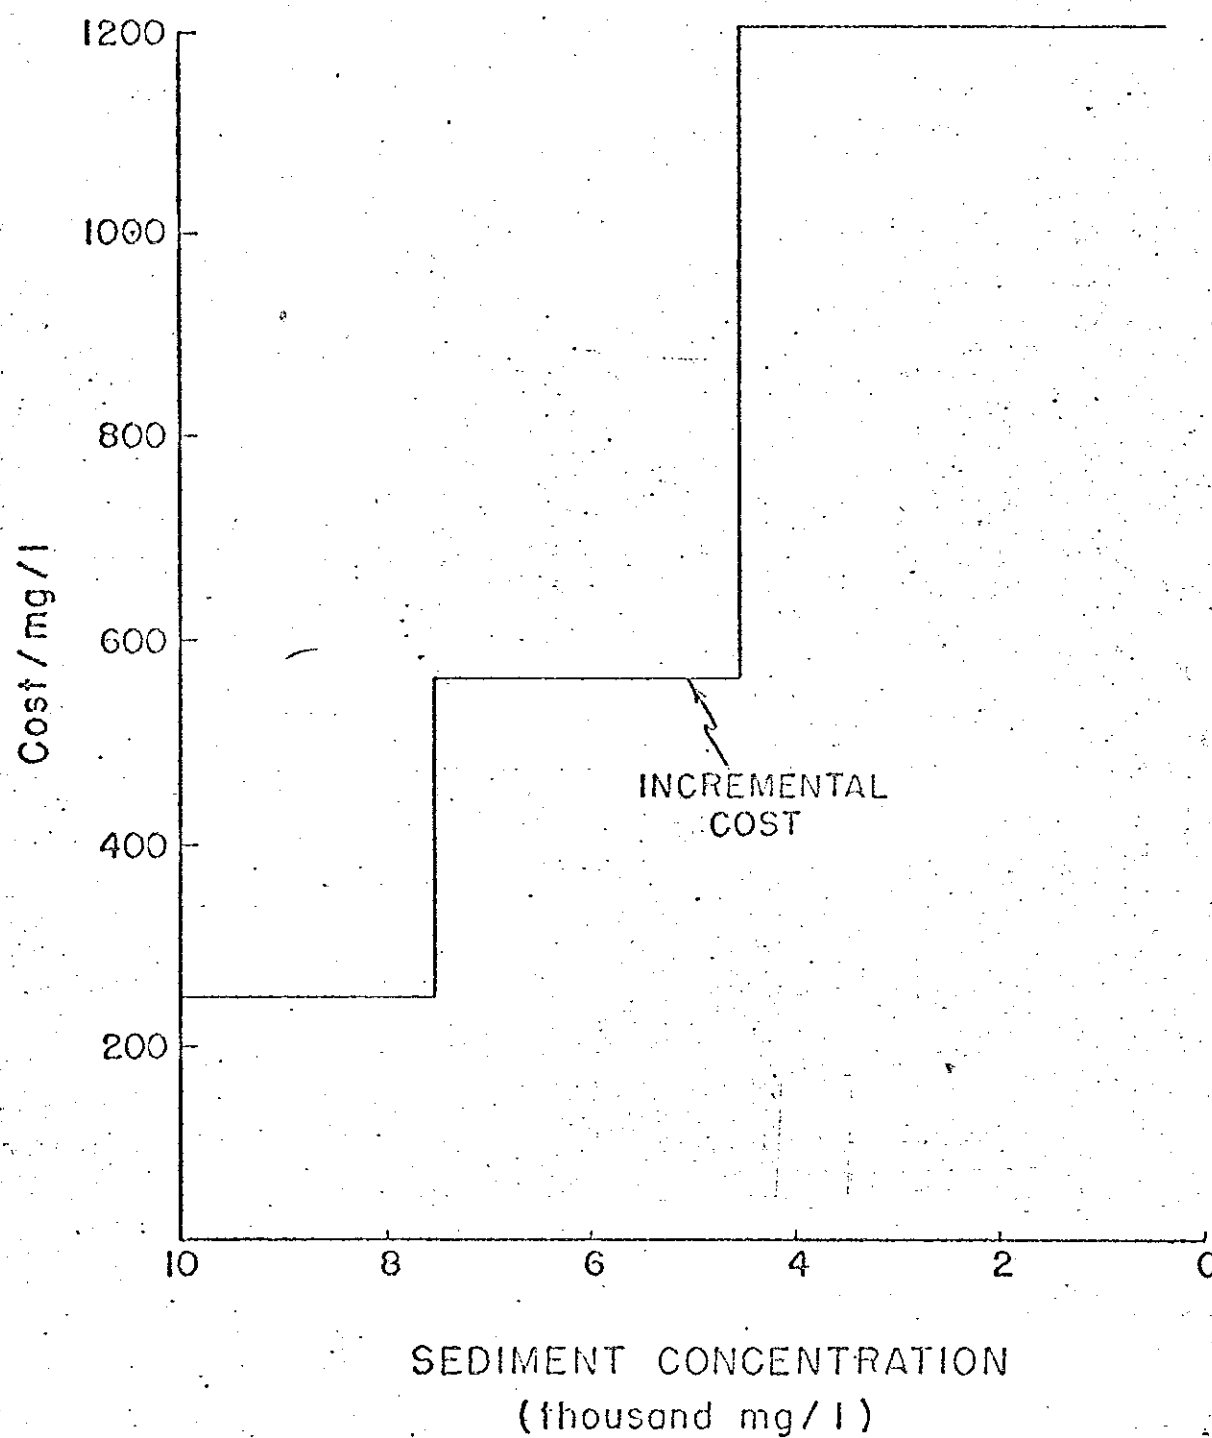


FIGURE 2. Incremental Costs of Sediment Control

Table 4
 Linear Programming Results: Sediment and Phosphorus
 Constraints with Three Delivery Ratios

Objectives Sediment Phosphorus (mg/l)	Limiting Phos- phorus Values	Value of Objective Function (total cost million \$)	Dual activity value for Objectives Sediment Phosphorus (marginal cost) (thousand) (million)
DR = .20			
10,000	1.600	0.206	-
9,000	0.594	0.227	-
8,000	0.586	0.235	0.264
7,000	0.580	0.243	0.566
6,000	0.555	0.243	0.923
5,000	0.522	0.222	1.484
4,000	0.476	0.193	2.045
3,000	0.413	0.155	2.607
2,000	0.328	0.122	3.997
1,000	0.209	0.076	5.451
500	0.127	0.044	6.178
250	0.075	0.024	6.541
150	0.049	0.014	6.687
75	0.029	0.005	6.796
37.5	0.016	0.0003	6.850

Table 4 Cont'd
 Linear Programming Results: Sediment and Phosphorus
 Constraints with Three Delivery Ratios

Objectives Sediment Phosphorus (mg/l)	Limiting Phos- phorus Values	Value of Objective Function (total cost million \$)	Dual activity value for Objectives Sediment Phosphorus (marginal cost) (thousand)(million)
DR = .25			
10,000	0.600	0.246	0.176
9,000	0.594	0.253	0.427
8,000	0.586	0.260	0.678
7,000	0.580	0.262	1.082
6,000	0.555	0.246	1.643
5,000	0.522	0.226	2.205
4,000	0.476	0.201	2.093
3,000	0.413	0.179	4.110
2,000	0.328	0.149	5.316
1,000	0.209	0.108	6.522
500	0.127	0.082	7.125
250	0.075	0.067	7.427
150	0.049	0.061	7.548
75	0.029	0.059	7.638
37.5	0.016	0.059	7.638

Table 4 Cont'd
 Linear Programming Results: Sediment and Phosphorus
 Constraints with Three Delivery Ratios

<u>Objectives</u> <u>Sediment</u> <u>Phosphorus</u> (mg/l)	<u>Limiting</u> <u>Phos-</u> <u>phorus</u> <u>Values</u>	<u>Value of</u> <u>Objective</u> <u>Function</u> (total cost million \$)	<u>Dual activity</u> <u>value for</u> <u>Objectives</u> <u>Sediment</u> <u>Phosphorus</u> (marginal cost) (thousand)(million)		
DR = .30					
10,000	0.600	0.167	0.543	0.21437	-
9,000	0.594	0.274	0.757	0.21437	-
8,000	0.586	0.271	1.241	0.56141	-
7,000	0.580	0.266	1.803	0.56141	-
6,000	0.555	0.250	2.364	0.56141	-
5,000	0.522	0.236	3.159	1.03073	-
4,000	0.476	0.220	4.190	1.03073	-
3,000	0.413	0.201	5.220	1.03073	-
2,000	0.328	0.173	6.251	1.03073	-
1,000	0.209	0.136	7.282	1.03073	-
500	0.127	0.115	7.979	1.03073	-
250	0.075	0.106	8.318	-	8.57258
150	0.049	0.104	8.583	-	7.70909
75	0.029	0.107	8.764	-	6.80359
37.5	0.016	0.112	8.863	-	6.12363

REFERENCES

1. Gratto, Charles P. Issues in environmental quality. A Primer on Agricultural Pollution. Reprint from Journal of Soil and Water Conservation 26: 44-45, 1971.
2. McKee, J. R. and Harold Wolf, eds. Water Quality Criteria. 2nd ed. California State Water Quality Control Board Pub. No. 3-A 1963.
3. Timmons, John F. Economics of pollution control. Iowa Agricultural and Home Economics Experiment Station. Paper No. J-6876: 77-85. March 1971.
4. Seay, Edmond Eggleston, Jr. Minimizing abatement costs of water pollutants from agriculture: a parametric linear programming approach. Un published Ph.D. thesis. Ames Iowa, Library, Iowa State University, 1970.
5. Aldrich, S. R., W. R. Oschwald and J. B. Fehrenbacher. Implications of Crop-Production Technology for Environmental Quality. AAAS Meeting, Chicago, Illinois, December 1970.
6. Duley, F. L. The loss of soluble salts in runoff water. Soil Science 21: 401-409. 1926.
7. Weidner, R. B., A. G. Christianson, S. R. Weibel, and G. G. Robeck. Rural runoff as a factor in stream pollution. Water Pollution Control Federation Journal 41: 377-384. March 1969.
8. Timmons, D. R., R. E. Burwell, and R. F. Holt. Loss of crop nutrients through runoff. Minnesota Science 24, No. 4: 16-18. 1968.
9. Miller, R. J. and W. R. Boggess. A two-dimensional approach to environmental research. Illinois Research 13, No. 2: 9-10. 1971
10. Edwards, William E. and Lloyd L. Harrold. Agricultural pollution of water bodies. The Ohio Journal of Science 70, No. 1: 50-56. 1970.
11. Casler, George L. Measurement of the Contribution of Agricultural Production and Processing to Environmental Pollution. Staff Paper No. 39. Department of Agricultural Economics, Cornell University, Ithaca, New York, July 1971.
12. Jacobs, James J. Economics of water quality management: Exemplified by specified pollutants in agricultural runoff. Unpublished Ph.D. thesis. Ames, Iowa, Library, Iowa State University. 1972.

REFERENCES CONT'D

13. Holt, R. F., R. H. Dowby, and D. R. Timmons. Chemistry of sediment in water. In Willrich, Ted L. and George E. Smith, eds. Agricultural Practices and Water Quality. Pp. 21-34. Ames, Iowa, Iowa State University Press. 1970.
14. Nicholson, H. Page. Occurrence and significance of pesticide residues in water. Journal of the Washington Academy of Sciences 59: 4-5. 1969.
15. Wischmeier, W. H. and D. D. Smith. Predicting Rainfall-Erosion Losses from Cropland East of the Rocky Mountains. U. S. Department Agri. Handbook 282. 1965.
16. Thomas, A. W., R. L. Carter and J. R. Carreker. Soil water and nutrient losses from Tifton Loamy Sand. ASAE Transactions 11, No. 5: 677-679. 1968.
17. Black, C. A. Behavior of soil and fertilizer phosphorus in relation to water pollution. In Willrich, T. L. and G. E. Smith. Agricultural Practices and Water Quality. Pp. 72-93. Ames, Iowa, Iowa State University Press. 1970.
18. Massey, H. F., M. L. Jackson, and O. E. Hays. Fertility erosion on two Wisconsin Soils. Agronomy Journal 45: 543-547. 1953.
19. Frankel, Richard Joel. Water quality management: an engineering-economic model for domestic waste disposal. Unpublished Ph.D. thesis. Berkeley, California, Library, University of California. 1965.
20. Kneese, Allen V. and Blair T. Bower. Managing Water Quality: Economics, Technology, Institutions. Baltimore, Maryland, The John Hopkins Press. 1968.