



AgEcon SEARCH
RESEARCH IN AGRICULTURAL & APPLIED ECONOMICS

The World's Largest Open Access Agricultural & Applied Economics Digital Library

This document is discoverable and free to researchers across the globe due to the work of AgEcon Search.

Help ensure our sustainability.

Give to AgEcon Search

AgEcon Search
<http://ageconsearch.umn.edu>
aesearch@umn.edu

*Papers downloaded from **AgEcon Search** may be used for non-commercial purposes and personal study only. No other use, including posting to another Internet site, is permitted without permission from the copyright owner (not AgEcon Search), or as allowed under the provisions of Fair Use, U.S. Copyright Act, Title 17 U.S.C.*

March 21-23, 2013

**DOUBLETREE HOTEL
ANNAPOLIS, MARYLAND**

Proceedings of the 54th Annual Transportation Research Forum



www.trforum.org

QUANTIFYING NON-RECURRING CONGESTION IMPACT ON SECONDARY INCIDENTS USING PROBE VEHICLE DATA

Hyoshin Park, University of Maryland
Ali Haghani, University of Maryland
Masoud Hamed, University of Maryland

ABSTRACT

As a significant cost and externality to economic efficiency, congestion is partly caused by traffic incidents. For more systematic, planned and coordinated incident management, quantifying a primary incident's impact on secondary incidents is crucial and challenging. Many thresholds have been suggested in defining the secondary incidents, but there is no universal acceptance of a definition and corresponding set of measurement parameters. Static threshold methods cannot consider the actual representation of prevailing traffic conditions when the incidents took place. On the other hand, dynamic methods have disadvantages because necessary traffic detector data may not be available, and replication of the incidents using a simulation package can be time consuming. The novelty of this study rests in the attempt of a probe vehicle technique for capturing the dynamics of traffic evolution during the primary-crash incidents. Compared to the previous thresholds which have many errors, proposed speed contour map from Traffic Message Channel codes provides accurate feasible area for identification of secondary incidents.

INTRODUCTION

Quantification of Incident's Impact

Congestion is a significant cost and externality to economic efficiency. Viable studies estimate that total U.S. congestion costs range from \$14 billion to \$200 billion annually. Fifty-five percent of total delay experienced by motorists is caused by roadway incidents in urban area population groups (TTI, 2011); and secondary crashes are estimated to cause 18% of all fatalities on freeways (TIM, 2010). Every minute that an incident remains partly cleared during peak congestion causes many more minutes of travel delay. Mitigating non-recurring congestion will return a strengthening economy.

Rubbernecking, physical impedance in the travel lanes, and other incident-related obstructions reduce capacity and impede flow. The resulting speed reduction and queue formation foment additional incidents, referred to as secondary incidents. Incident characteristics, incident duration, traffic conditions, and secondary incident occurrence are related to one another in a close way (Figure 1). Indeed, the longer an incident scene is in place caused by its characteristics, the greater the likelihood for secondary incidents. Moreover, the total time for an incident to be cleared can be increased by the occurrence of secondary incidents, and the travelers may experience ever-increasing congestion.

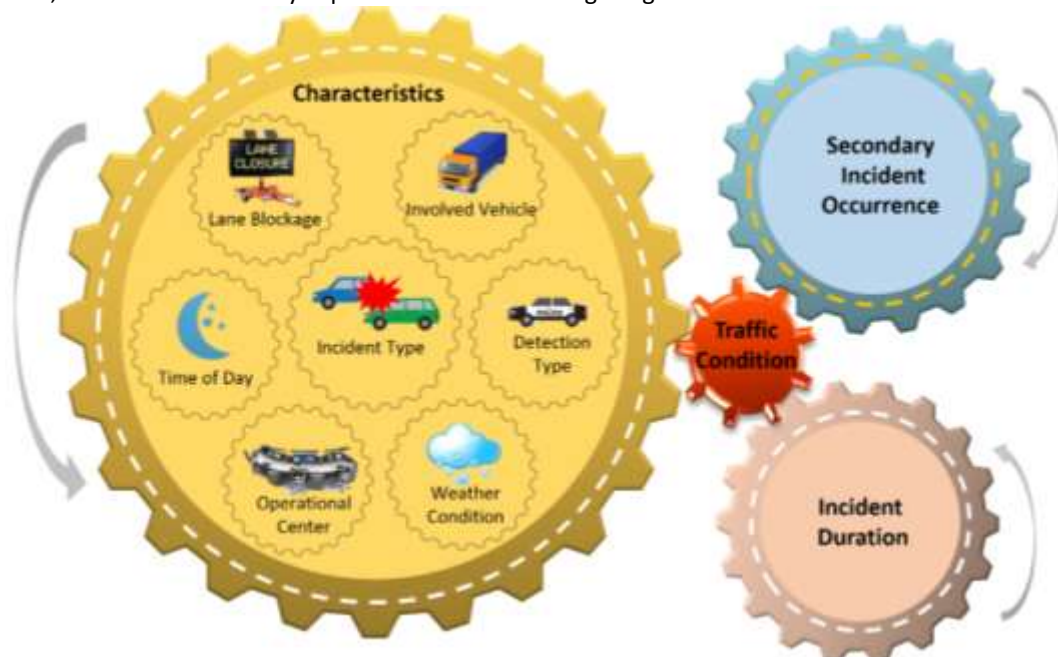


Figure 1. Relationship between Secondary Incident Occurrences and Contributing Factors

Incident management with systematic, planned, and coordinated resources provide tools to enhance performance of response team to reduce the duration and impact of incidents and improve the safety of motorists. To maximize the effectiveness of these operational strategies, accurate and dynamically predicted incident duration, length of queue, and chances of secondary incident occurrence can aid to real time information for travelers (e.g., variable message signs update, cell phone text messages alert). Traffic operators can assess the need to implement detour operations and any other control strategies to mitigate congestion. Furthermore, the benefits of the incident management program are identified by measuring the reduction of incident's negative impacts. Transportation safety, however, does not seem ready to embrace this critical issue. Given the wide variety of causes and impacts of non-recurring congestion, it is especially difficult to quantify discrete, random, and complex incident nature in a system level. In addition, poor quality of incident data encumbers the accurate identification, generalization and prediction of the impact of incidents.

Identification of Secondary Incidents Using Advanced Traffic Data

We cannot exaggerate the importance of using a reasonable threshold in defining the secondary incidents, because it has an influence on the accuracy of the result and validity of the proposed theoretical frame. The most frequent method used to identify the secondary incidents is the static method (i.e., proximity in time and space). However, this condition is not sufficient, as it does not consider the actual representation of prevailing traffic conditions when the incident took place. In addition, this method is more likely to produce biased results as it depends on the values of chosen thresholds. On the contrary, several dynamic methods were proposed based on simulation or inductive loop detector data. However, using a deterministic queuing method in real-time is inappropriate because exact identification of traffic arrival rate and capacity reduction is difficult, and quality of raw data from inductive loop detector maybe unsatisfactory.

In recent years, the vehicle probe industry is emerging as a viable means to monitor network-wide traffic flow, delivering both speed and travel time information. This is a new opportunity to use real-time estimation of queue length to identify feasible area for secondary incident. An adjusted boxplot is used to separate the non-recurrent congestion from recurrent congestion that is present on the road at the time and place of an identified accident. With the speed contour output from probe vehicle data, the analysis of the secondary incidents becomes a geometrical exercise of determining of the extent of the feasible region. The secondary incidents and primary incidents are examined using the time-space evolution of disturbance boundaries while considering only the impact of isolated incidents.

SECONDARY INCIDENT FILTERING

Impact Area for Secondary Incidents

The identification of an incident as secondary to a primary incident is described in Figure 2. First, from the reported incident characteristics and traffic conditions, incident duration can be predicted. Upstream of the incident, a queue has formed from the time the primary incident "P" occurred until the service rate exceeds the queue arrival rate. This entire timeline is defined as temporal impact area, and spatial impact area changes over time according to the evolution of traffic flow. Then, incident "S" within this impact area is classified as a secondary incident. Queue dissipation covers the time the incident is cleared to the time that normal flow returns.

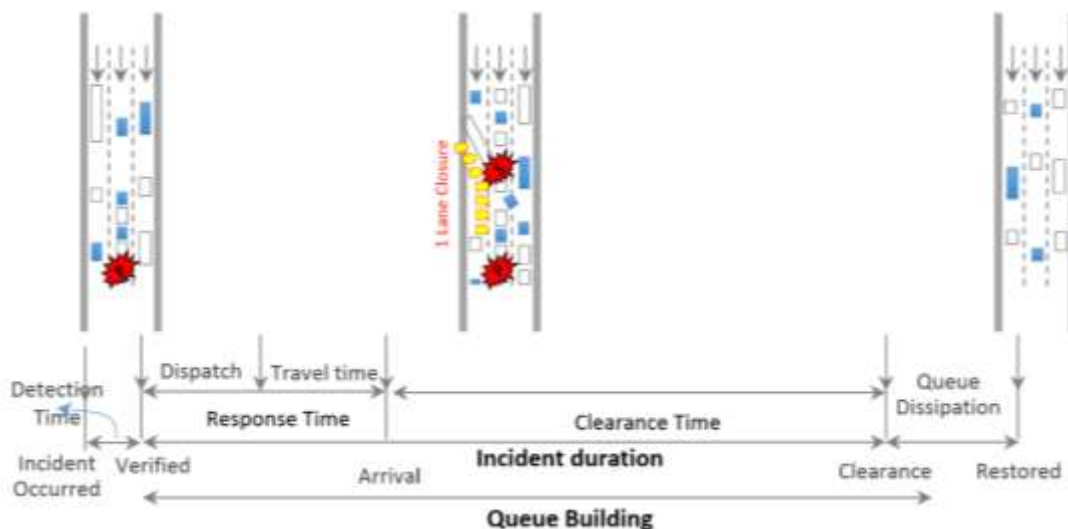


Figure 2. Incident Timeline and Feasible Area

Static and Dynamic Feasible Area

Several methods are available in the literature to indicate the existence of a feasible area for secondary incidents occurrence, most of which focused on temporal and spatial thresholds related to primary incidents. For example, Raud (1997) defined any incident within static thresholds of 1 mile and 15 minutes as a secondary incident. Similar static feasible areas were also discussed by Karlaftis et al., 1999; Moore et al., 2004; Hirunyanitiwattana and Mattingly, 2006; Zhan et al., 2008, Khattak et al., 2009. Most studies used Annual Average Daily Traffic as aggregated traffic related information.

On the other hand, Haghani et al. (2006) initiated the study for dynamic thresholds, which is identified from the shockwave that arises as a consequence of the incident in the simulation model. A set of preselected time intervals are employed in seeking the impact area during a specific time interval for each incident. Mathematically represented impact area requires smaller time interval for greater accuracy of the estimation method. Chou and Miller-Hooks (2010) also considered the dynamics associated with traffic state by using simulation-based secondary incident filtering method (SBSIF). Regression implementation of SBSIF has a significantly reduced misclassification rate as compared with static methods. Replication of the incidents using a simulation package can be time consuming.

Sun and Chilukuri (2010) presented a methodology in order to improve upon the existing method of static thresholds by formulating dynamic boundaries. An incident progression curve was used to indicate that dynamic and static methodology can differ by more than 30%. However, the third order polynomial equation were identically applied to all incidents, regardless of traffic volume. In addition, archived incident data might have limited queuing information.

Zhan et al. (2009) and Vlahogianni et al. (2010) defined the spatio-temporal boundary for each secondary crash based on maximum queue length and the queue duration induced by the crash. The similar approach has been studied by using deterministic queue model to estimate associated delays (Zhang and Khattak, 2010, 2011; Khattak et al., 2012). If a spillback is observed, the queue length is estimated by a deterministic D/D/1 model with estimated arrival and departure flow rates based on Highway Capacity Manual methodologies. However, it is inappropriate to use a deterministic queuing approach for real-time application in non-recurring congestion, since it assumes exact identification of arrival rate and capacity reduction (Fu and Rilett, 1997).

Vlahogianni et al. (2012) improved secondary incident detection methodology by capturing the propagation of wide moving jam generated at the upstream and the downstream to calculate the changing queue length. As criticized by Schönhof and Helbing (2009), a congestion caused by accident might not classify the pronounced stop-and-go waves as “wide moving jams.” Hence, secondary incident with the characteristic spatial structure of a “general pattern” (“synchronized flow”, “pinch region” with jam formation, and a region of “wide moving jams”) cannot be perfectly explained by their models. Table 1 summarizes existing secondary incident identification method.

Table 1. Existing Secondary Incident Identification Method

Static method		Dynamic method	
Raud (1997)	1 mi, 15 min	Haghani et al. (2006)	Simulation-based method employing shockwaves
Karlaftis et al. (1999)	1 mi, Clearance time + 15min	Chou and Miller-Hooks (2010)	Simulation-based filtering method (SBSIF).
Moore et al. (2004)	2 mi, 2 hr	Sun and Chilukuri (2010)	Incident progression curve
Hirunyanitiwattana and Mattingly (2006)	2 mi, 60 min	Vlahogianni et al. (2010)	Observed maximum queue length and the queue duration
Zhan et al. (2008)	2 mi, 15 min	Zhang and Khattak (2010, 2011), Khattak et al. (2012)	Deterministic queue estimation
Khattak et al. (2009)	1 mi, Clearance time + 15min	Vlahogianni et al. (2012)	ASDA model automatically tracks the propagation of moving traffic jams

METHODOLOGY

Impact of Non-Recurrent Congestion

As discussed, deterministic queue model approach may have over- or under- estimated the actual delay of primary-secondary incident events. This approach assumes that precise identification of capacity reductions can be available. However, accurate measurement of incident capacity reduction is not straightforward. Still, many researchers primarily rely on simulation analysis (e.g., CORSIM, VISSIM) that have the ability to replicate rubbernecking by proportionally increasing the distances at which the vehicles are following one another (Haghani et al., 2006). Deterministic queuing model may be adequate for after-incident evaluation, for which information on the traffic volume and incident situation is readily available. Moreover, unsatisfactory quality of raw data from inductive loop detector can decrease accuracy of incident detection rate.

On the contrary, methodology of this study is based on real-time traffic conditions for one-minute interval from each TMC segment. Here, we need to define whether each TMC segment is under the non-recurrent congestion or not. However, separation of the non-recurrent congestion from recurrent congestion is a hard task because there is no correct answer. It is more challenging than discriminating congestion from non-congestion.

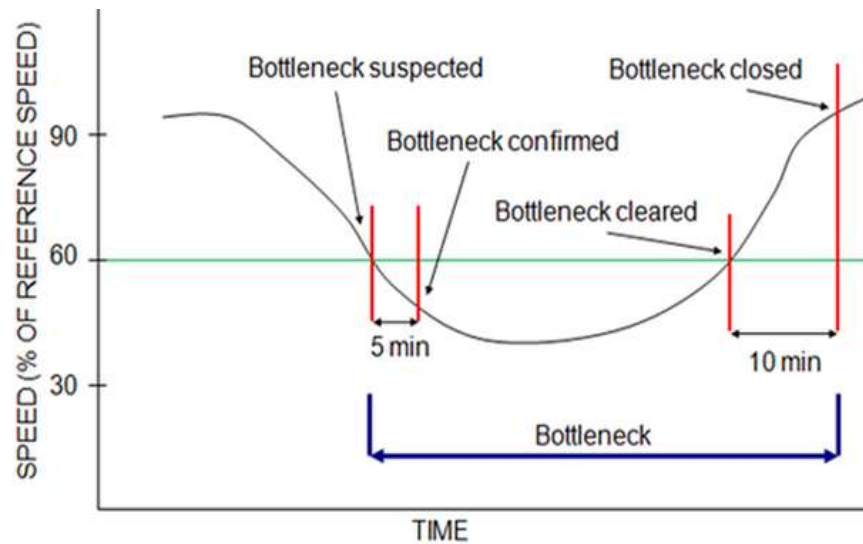


Figure 3. A Tool for Real Time Estimation of Queue

As shown in Figure 3, queue estimation tool is currently used in real time at the CATT Lab. Traffic conditions can be determined by comparing the current reported speed to the reference speed for each segment of road. Reference speed values are calculated based upon the 85th-percentile of the observed speeds on that segment for all time periods, which establishes a reliable proxy for the speed of traffic at free-flow for that segment. TMC segments represent bottleneck or congestion in which the actual travel speed drops below 60% of the reference speed longer than 5 minutes. Once the travel speed returns to a value greater than 60% of the reference speed for 10 minutes, TMC segment is no more in congestion.

Another tool was discussed by Chung and Recker (2012). Distance of a data point from the mean in standard deviation units was used to separate any particular crash speed from the distribution of crash-free speeds. They applied constant threshold empirically found by using the relationship between randomly selected accident samples and their associated traffic data. The determinant threshold value discriminates two regions: congested regions affected by a crash and uncongested regions.

However each accident data may have different thresholds and following difficulties in successfully representing the nature of accidents, compared to non-accident cases. We need a robust method to consider accident impact with the measurement of each distribution. This paper proposes a method that can be applied to all distributions, even without finite moments.

An Adjusted Boxplot Method

The boxplot is one of the most frequently used graphical tools for visualizing the distribution of continuous data (Tukey, 1977). It can be constructed by putting a line at the height of the sample median Q_2 , drawing a box from the first quartile Q_1 to the third quartile Q_3 . The length of this box equals the inter-quartile range, $IQR = Q_3 - Q_1$, as a robust measure of the scale. All points outside the interval in Equation 1 can be classified as potential crash cases.

$$[Q_1 - 1.5 \text{ IQR}; Q_3 + 1.5 \text{ IQR}] \quad (1)$$

However, observations outside the fence are not necessary real crash-cases that behave differently from the majority of the data. At thick tailed symmetric distributions, many regular observations will exceed the outlier cutoff values defined in Equation 1, whereas data from thin tailed distributions will hardly exceed the fence (Hoaglin et al. 1983). We use the medcouple (MC) to measure the skewness of a univariate sample from a continuous distribution F,

$$MC = \text{med}_{x_i \leq Q_2 \leq x_j} h(x_i, x_j) \quad (2)$$

for all $x_i \neq x_j$, kernel function h is defined as

$$h(x_i, x_j) = \frac{(x_j - Q_2) - (Q_2 - x_i)}{x_j - x_i} \quad (3)$$

Medcouple always lies between -1 and 1. A distribution that is skewed to the right has a positive medcouple, whereas the MC becomes negative at a left skewed distribution. As shown in Hubert and Vandervieren, 2008, exponential model in the definition of our adjusted boxplot to define the boundaries of the interval.

$$[Q_1 - h_l(MC) \text{ IQR}; Q_3 + h_u(MC) \text{ IQR}] \quad (4)$$

Additionally, we require that $h_l(0) = h_u(0) = 1.5$ in order to obtain the standard boxplot at symmetric distributions. Note that by using different functions h_l and h_u in Equation 5, we allow the fence to be asymmetric around the box, so that adjustment for skewness is indeed possible.

$$h_l(MC) = 1.5e^{aMC}, \quad h_u(MC) = 1.5e^{bMC} \quad (5)$$

As studied by Chung and Recker (2012), we can define speed at section i at time $t_n: S_i(t_n)$, and consider if $S_i(t_n) \leq Q_1 - h_l(MC) \text{ IQR}$: under crash impact area; $S_i(t_n) > Q_1 - h_l(MC) \text{ IQR}$: crash-free area. A continuous region affected by crashes can be described and used for identifying secondary crashes.

CASE STUDY

Vehicle Probe Technology Based Data

In previous studies, loop detectors were used to collect flow rate or speed data. It is important to point out that the results of these methods depend almost entirely on loop detectors performance. However, traffic data from loop detectors often contain invalid data (e.g., missing value, negative value, and non-zero speed with zero count) due to malfunctioning detectors, communication failures, and other reasons. Discarding values outside of the expected ranges potentially can lead to over-fitting, which diminishes the effectiveness of the model (Washington et al., 2003).

Estimating traffic state from loop detectors has another challenge for accurately representing the traffic conditions on other parts of the road link. The travel speed from loop detector can be estimated using conventional method such as g-factor method. However the g-value, related to the average effective vehicle length, may not be constant (Hall and Persaud, 1989; Pushkar et al., 1994). The percentage of long vehicles may vary significantly during different time periods and introduce huge errors in some situations (Lao et al., 2012).

Moreover, high installation and maintenance cost of fixed-point sensors drives transportation management authorities to consider both outsourcing traffic monitoring and developing new method of detection.

Recently, vehicle probe technology is increasingly becoming more attractive for real-time system state estimation, and it is a common practice for data providers to report data on Traffic Message Channel (TMC) codes. INRIX reports average speed as a normalized measure of travel time on each TMC segment, along with a score in one-minute interval. Hamed and Haghani (2012) concluded that the INRIX travel time and speed data on the freeway segments generally satisfies the requirements of applications for real-time travel time display.

The novelty of this study rests in the attempt of explaining the dynamics of traffic evolution during the primary-crash incident using vehicle probe technology, which covers the I-695 corridor from MD-150/Eastern Blvd/Exit 38 end to the MD-151/North Point Blvd/Exit 40. INRIX provides data on all of these segments. Data from the Vehicle Probe Project comes primarily from the vehicles operating as anonymous probes. Meaningful travel time information for each TMC segment is achieved after data processing: aggregation, filtering, and smoothing. Then INRIX assigns a quality indicator to each travel time record based on real-time GPS tracks (score 30), archival data (score 10) or a combination of both (score 20); only qualities satisfying a score more than 20 are used for this study. Table 2 shows the list of TMC segments that are covered in I-695 corridor including beginning and endpoint as well as length of each TMC segment.



Figure 4. Collision Incidents on I-695

Table 2. List of TMC Segments on I-695

TMC	Start Lat	Start Long	End Lat	End Long	Length(mi)
110P04555	39.2063	-76.5913	39.2066	-76.6119	1.11
110P04520	39.2968	-76.7426	39.3130	-76.7445	1.12
110-04523	39.3820	-76.7376	39.3780	-76.7440	0.45
110-04520	39.3122	-76.7447	39.3118	-76.7447	0.03
110-04519	39.2994	-76.7432	39.2894	-76.7414	0.70
110+04527	39.3922	-76.7071	39.3959	-76.6877	1.08
110N04535	39.4017	-76.5629	39.4019	-76.5683	0.30
110P04512	39.2363	-76.6677	39.2391	-76.6685	0.20
110+04542	39.3346	-76.4904	39.3344	-76.4902	0.02
110P04514	39.2460	-76.6749	39.2561	-76.6914	1.15
110P04532	39.4131	-76.6040	39.4136	-76.5958	0.44
110P04549	39.2336	-76.5043	39.2320	-76.5071	0.18
110-04558	39.2044	-76.6392	39.2025	-76.6347	0.28
⋮		⋮		⋮	⋮
110+04519	39.2818	-76.7308	39.2841	-76.7351	0.28
110+04560	39.2067	-76.6424	39.2099	-76.6482	0.38
110+04531	39.4151	-76.6252	39.4129	-76.6160	0.53
110+04541	39.3446	-76.4949	39.3379	-76.4937	0.47
110P04523	39.3650	-76.7473	39.3780	-76.7438	0.94
110N04537	39.3867	-76.5265	39.3899	-76.5339	0.45
110+04546	39.2835	-76.4897	39.2802	-76.4783	0.65
110P04518	39.2768	-76.7253	39.2818	-76.7308	0.47
110+04528	39.3980	-76.6840	39.4066	-76.6691	1.01
110N04549	39.2319	-76.5071	39.2336	-76.5042	0.19
110-04526	39.3954	-76.6944	39.3928	-76.7065	0.68
110+04529	39.4146	-76.6602	39.4207	-76.6449	0.96
110-04536	39.3899	-76.5339	39.3946	-76.5447	0.67

The incident data along this I-695 corridor are investigated. In total, 5524 incidents (e.g., disabled vehicle, weather event, road maintenance, collision incidents, vehicle on fire, debris) from May 2011 to October 2011 are collected. 614 collisions (e.g., fatality, personal injury, and property damage) and vehicles on fire incidents are regarded as candidates for primary-secondary incident pair. Based on incident location, traffic data from TMC codes are used to present traffic state of each segment. The archived incident and probe vehicle database are provided by Center for Advanced Transportation Technology Laboratory (CATT Lab) at the University of Maryland. Figure 4 illustrates the number of collision incidents for each road sections on I-695.

Accurate Impact Area for Secondary Incidents

When the speeds of vehicles return to normal after an incident, the queue has dissipated. The length of queue could be tracked based on the vehicles or interpreted from traffic speed contour plots. Based on configuration of crash impact for each segment, one can develop a daily speed contour map for the entire section of I-695 corridor (September 1, 2011, Thursday), as shown in Figure 5. For better representation, each cell was aggregated to one hour averaged traffic speed for TMC

segments. Shaded cell represent temporal-spatial area under non-recurrent congestion. Some segments of freeway corridor experience traffic congestion during morning and afternoon peak hours, and also due to incidents.

Vehicles upstream of an incident event, near the I-695 outer loop at I-795 / Exit 19 (TMC 110N4523) 1:25 PM, should be in a slow-moving queue. It is because of following vehicles suffer from congestion with traffic condition rapidly decelerating from normal driving speed or free-flow speed to stop-and-go traffic. When they pass the incident, they should speed up to normal driving speed or even free-flow speed. There are two additional incidents in southbound direction, and one incident in the opposite direction (northbound) within this temporal-spatial congestion area, and they have possibilities to be regarded as secondary incidents.

As shown above, speed information from probe vehicle data can capture the impact of an incident based on incident's characteristics and prevailing traffic conditions. Figure 6 shows micro-detail feasible area expressed by queue length from TMS segment information and dynamic changes of congestion pattern. To facilitate illustration of secondary incident phenomena, 1-minute interval of speed contour plots from onset of incident to queue dissipation are investigated. To clear the primary incident, in which a truck is on its side carrying diesel fuel resulting in a two-vehicle collision with injury, two lanes are blocked for whole clearance and 13 operation units are dispatched (including police, fire, emergency medical personnel, Coordinated Highways Action Response Team units, tow services, public affairs, and flatbed). Incident's characteristics indicate different rubbernecking phenomenon which perpetuates in the impact area with different intensities depending on the cross and longitudinal location with respect to the incident. Especially, in this larger scale event, multiple secondary incidents have higher likelihood to occur and their clearance takes longer time.

Speed reduction from the primary incident (incident "1" ID: 25001beda3bf015f) may have an impact on the possibility of secondary incident occurrence (incident "2" ID: d3ffbed1aadf015f) at I-695 Perring parkway, 3:41 PM. This may make the period of congestion even longer and cause an additional secondary incident event (incident "3" ID: 510018b2b8130160) at I-695 Loch Raven blvd., 7:22 PM. Moreover, incident influences not only on the incident direction but also on the opposite direction. Incident 4 (event ID: 2000daabba250160) can be defined as a secondary incident in the opposite direction. Then, when drivers pass the incident, they should speed up to normal driving speed. Traffic flow conditions will return to normal after 7:37PM. Therefore, incident "5" (event ID: 6f00f848a5cf015f) is not identified as a secondary incident.

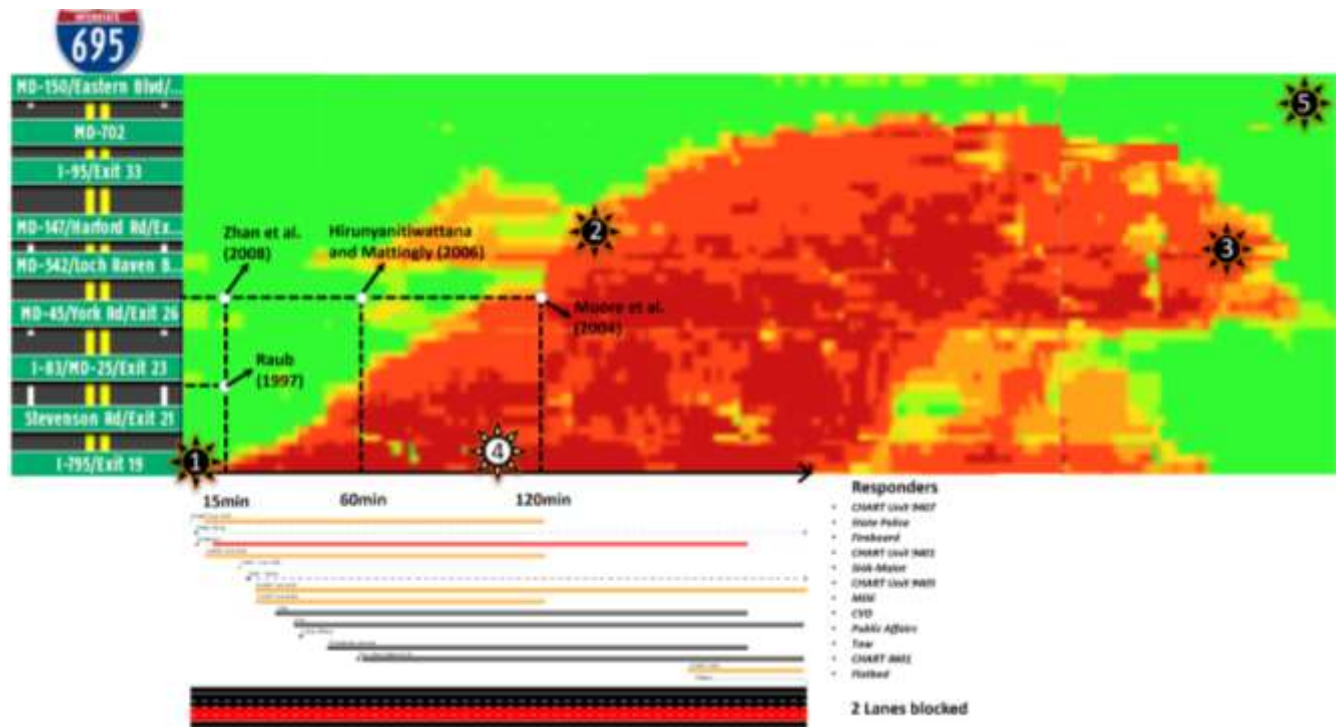


Figure 6. Secondary Incident Classification by Proposed Methods (1min intervals)

TMC/Hour	0	1	2	3	4	5	6	7	8	9	10	11	noon	13	14	15	16	17	18	19	20	21	22	23
110-04544	62	61	63	61	61	65	58	60	59	60	60	62	56	57	61	62	62	60	61	63	60	58	63	60
110N04544	64	63	65	63	63	64	60	61	60	61	61	57	49	45	61	62	58	44	53	64	61	59	65	61
110-04543	60	59	60	58	59	60	59	59	59	56	18	11	12	13	57	60	54	44	51	61	54	38	61	59
110N04543	54	53	54	53	54	54	55	53	53	51	31	37	35	36	53	53	53	53	52	52	53	48	56	53
110-04542	61	60	60	60	59	57	57	55	56	59	52	50	57	55	58	55	56	56	56	59	55	58	62	60
110N04542	59	61	60	60	59	58	57	57	56	59	56	55	57	55	59	57	54	40	54	59	55	57	61	59
110-04541	60	60	62	62	60	59	57	58	57	59	56	56	57	57	59	60	54	27	49	56	56	59	62	62
110N04541	60	60	62	61	60	58	58	57	58	59	57	58	58	58	59	59	52	19	47	58	55	58	61	61
110-04540	60	59	61	60	60	58	59	56	56	57	56	57	59	56	58	59	43	15	42	57	56	56	60	58
110N04540	59	60	61	60	60	59	59	56	53	54	57	59	58	56	58	59	34	15	32	58	58	58	59	62
110-04539	59	60	60	59	63	61	62	39	16	41	58	61	59	58	59	59	23	12	18	57	60	59	60	62
110N04539	59	62	64	60	62	61	64	31	11	43	60	61	60	60	60	56	17	14	19	51	60	60	63	64
110-04538	59	60	63	59	60	61	61	23	11	39	60	60	59	59	57	48	16	12	20	48	59	60	62	61
110-04537	65	65	65	63	65	66	62	17	10	41	64	63	63	64	57	37	12	10	14	51	64	65	67	65
110N04537	65	64	65	63	65	66	59	15	11	29	64	63	63	64	54	29	12	10	14	46	64	65	67	65
110-04536	60	61	66	61	62	63	58	27	17	32	58	60	58	58	52	32	14	9	16	39	61	60	62	62
110N04536	59	57	65	60	60	61	59	41	26	45	57	59	57	58	46	35	15	9	22	35	58	58	60	59
110-04535	59	61	66	61	62	62	61	45	29	45	60	60	58	59	45	26	11	7	18	32	59	59	60	61
110N04535	60	63	66	62	62	64	61	41	24	35	59	62	60	60	40	20	11	7	14	33	59	61	62	63
110N04534	62	63	66	63	63	65	61	36	21	28	58	63	61	61	32	16	9	7	15	33	61	63	63	65
110-04533	59	61	64	61	61	62	57	46	29	34	56	60	57	57	39	21	13	8	15	33	58	60	62	62
110N04533	59	62	64	62	62	63	61	54	38	49	60	60	60	59	55	24	11	10	13	34	60	61	63	62
110-04532	61	62	64	62	63	64	63	57	36	49	61	62	60	60	58	22	9	9	13	36	61	62	63	63
110N04532	59	61	63	60	61	61	60	51	32	46	59	60	58	58	57	15	7	9	11	29	61	59	60	62
110-04531	60	61	64	61	62	62	61	49	30	44	59	60	57	58	56	11	7	7	10	27	61	60	60	62
110N04531	59	59	63	59	60	61	57	41	27	39	57	57	54	55	49	9	7	9	11	25	59	58	60	61
110-04530	58	58	62	57	60	59	55	45	35	39	54	54	49	52	44	11	7	10	9	28	57	56	58	60
110N04530	58	58	62	58	59	59	57	51	50	50	55	54	50	53	46	11	8	13	15	40	56	57	58	61
110-04529	59	58	62	58	59	59	59	55	54	52	56	56	52	54	49	16	15	18	30	47	56	57	59	58
110N04529	59	59	59	59	60	60	61	59	58	58	59	59	58	57	46	11	12	15	37	53	58	60	62	60
110-04528	61	61	62	60	64	62	63	62	61	62	62	62	61	62	45	10	10	17	37	61	61	62	62	62
110N04528	62	63	62	63	65	64	65	63	64	64	64	64	62	63	38	10	9	19	42	62	63	62	63	62
110-04527	60	60	60	61	63	62	64	61	64	61	63	63	60	58	31	10	8	20	33	61	60	59	62	59
110N04527	60	60	64	63	63	63	65	62	64	62	63	63	61	59	20	11	11	30	32	62	59	59	62	60
110-04526	63	63	64	64	63	64	66	64	62	64	64	66	63	63	19	9	13	31	30	64	64	63	65	63
110N04526	64	64	64	64	63	65	67	65	52	65	65	66	65	64	15	10	13	23	28	65	65	65	65	65
110-04525	62	65	65	63	63	63	66	59	43	61	60	66	62	60	12	11	10	22	27	63	62	63	63	61
110N04525	62	64	64	66	63	64	67	57	37	62	63	67	62	57	13	12	14	27	31	63	62	62	63	62
110-04524	61	63	64	63	62	63	65	47	30	60	62	66	60	55	12	12	13	20	31	61	60	61	63	62
110N04524	63	65	65	66	65	66	61	31	19	62	64	68	63	49	10	7	6	15	22	63	63	63	66	63
110-04523	63	64	63	64	64	64	50	12	12	58	63	66	61	41	8	6	6	14	16	57	63	63	64	63
110N04523	61	62	62	65	63	62	39	13	12	49	61	63	59	33	8	7	8	17	17	51	61	61	62	60
110-04522	60	61	61	62	64	62	37	29	28	48	61	62	60	59	51	53	54	29	26	51	60	60	61	60
110N04522	59	60	59	60	63	60	37	34	30	46	57	58	57	59	60	56	57	30	23	51	58	57	61	59
110-04521	61	62	62	62	64	62	56	42	37	45	56	60	60	63	63	62	62	38	33	57	60	60	60	62
110N04521	61	63	62	61	64	63	62	33	24	23	32	47	45	57	63	63	62	30	34	61	60	60	60	62
110-04520	60	62	61	60	63	62	61	35	29	26	38	51	48	57	61	61	61	35	37	60	60	60	60	62
110N04520	62	63	61	61	65	64	61	29	21	19	23	34	36	50	64	64	63	26	31	63	61	61	62	63
110-04519	63	64	60	61	64	64	59	36	29	28	30	35	34	47	62	62	62	35	43	63	59	62	62	64
110N04519	60	59	58	59	62	63	56	44	36	38	44	46	45	53	59	59	59	43	48	64	56	58	59	61
110-04518	60	60	60	60	64	63	57	52	44	51	50	56	55	58	61	61	60	47	52	59	58	59	61	63
110N04518	61	61	61	62	64	63	59	57	58	56	57	60	58	60	61	62	61	55	55	60	60	61	62	63
110-04517	60	60	60	60	63	62	60	58	59	57	57	60	58	60	60	61	60	56	56	60	60	60	61	62
110N04517	61	62	61	63	65	64	62	60	61	59	60	62	61	62	63	63	63	60	58	60	62	62	62	63
110-04516	64	62	64	64	66	66	65	64	65	63	63	65	64	65	65	66	66	63	62	63	64	64	64	66
110N04516	64	64	64	64	68	68	65	65	66	65	64	67	65	66	66	68	67	65	64	64	65	66	65	67
110-04515	62	62	63	64	66	67	64	64	65	65	63	65	64	65	65	65	65	65	64	63	63	65	63	65

Figure 5. Traffic Speed Contour for September 1, 2011 (Southbound)

Compared to static threshold methods in previous studies, the probe-based filtering method has superiority. Including the methods proposed by Raud (1997), Hirunyanitiwattana and Mattingly (2006) and Zhan et al. (2008), only the proposed method can capture incidents “2” and “3” as secondary incidents. Moreover, incident “4” in the opposite direction only can be identified method proposed by this study and Moore et al. (2004). In this way, among 614 collision incidents on I-695, 112 (18%) are classified as primary-secondary pair based on archived incident and probe vehicle data.

CONCLUSIONS AND RECOMMENDATIONS

Modern data collection technologies enabled us to look into critical factors for incident duration and establish a deliberate incident management plan. In this study, probe vehicle technique is used to capture the dynamics of traffic evolution during the primary-crash incident. Compared to static threshold method in previous studies, probe-based filtering method has better result in identifying secondary incidents. Once there is a universal acceptance of a definition and corresponding set of parameters of secondary incidents, jurisdictions can be applied to compare incident reports. Data used in previous studies are not reasonable because necessary traffic detector data may not be available and replication of the incidents using a simulation package can be time consuming. The novelty of this study rests in the attempt to use INRIX speed data on the identification of secondary incidents of freeway segments, which generally satisfies the requirements of applications for real-time travel time display. However, proposed methodology cannot be applied to freeway segments which probe vehicle data are not available. Recently, vehicle probe technology is increasingly becoming more attractive for real-time system state estimation, and it is a common practice for data-providers to report data on TMC codes. Especially in State of Maryland, freeway corridors (e.g., I-495, I-95, I-295, I-83, and I-270) are providing probe vehicle data. Including more incident data on improved road segment as well as more time period will help developing robust model. Accurate and understandable information provided by the tool may help emergency operator to make a better decision, and maximize the effectiveness of incident management.

REFERENCES

- Chou, C. and E. Miller-Hooks. “Simulation-Based Secondary Incident Filtering Method.” *Journal of Transportation Engineering* 136 (8), (2010): 746-754.
- Chung, Y. and W.W. Recker. “A Methodological Approach for Estimating Temporal and Spatial Extent of Delays Caused by Freeway Accidents” *IEEE Transactions On Intelligent Transportation Systems* 13 (3), (2012): 1454-1461.
- Fu, L. and L.R. Rilett. “Real-time Estimation of Incident Delay in Dynamic and Stochastic Networks.” *Transportation Research Record: Journal of the Transportation Research Board* 1603, (1997): 99-105.
- Haghani, A., D. Iliescu, M. Hamed, and S. Yong. “Methodology for Quantifying the Cost Effectiveness of Freeway Service Patrols Programs - Case Study: H.E.L.P. Program.” *I-95 Corridor Coalition*, MD., 2006.
- Hall, F. L., and B.N. Persaud. “Evaluation of Speed Estimates Made with Single-Detector Data from Freeway Traffic Management Systems.” *Transportation Research Record: Journal of the Transportation Research Board* 1232, (1989): 9–16.
- Hamed, M. and A. Haghani. “DDOT ITS Master Plan Task 3: Estimation of Real-time Travel Time and Develop a Solution for Travel Time Display.” *District Department of Transportation*, URL: <http://www.scribd.com/ddotdc>, October 2012.
- Hirunyanitiwattana, W. and S. Mattingly. “Identifying Secondary Crash Characteristics for the California Highway System.” *The 85th Annual Meeting of Transportation Research Board Paper #06-2900 (CD-ROM)*, Washington, D.C., 2006.
- Hoaglin, D.C., F. Mosteller, and J.W. Tukey. “Understanding Robust and Exploratory Data Analysis.” *Wiley*, New York, (1983): 58–77.
- Hubert, M., E. Vandervieren, “An adjusted boxplot for skewed distributions.” *Computational Statistics and Data Analysis* 52 (2008): 5186–5201.
- Karlaftis, M.G., S.P. Latoski, N.J. Richards, and K.C. Sinha. “ITS Impacts on Safety and Traffic Management: An Investigation of Secondary Crash Causes.” *Journal of Intelligent Transportation Systems* 5 (1), (1999): 39-52.

- Khattak, A., X. Wang, and H. Zhang. "Are Incident Durations and Secondary Incident Occurrence Interdependent?" *Transportation Research Record: Journal of the Transportation Research Board* 2099, (2009): 39-49.
- Khattak, A., X. Wang, and H. Zhang. "Spatial Analysis and Modeling of Traffic Incidents for Proactive Incident Management and Strategic Planning" *Transportation Research Record: Journal of the Transportation Research Board* 2178, (2010): 128-137.
- Khattak, A., X. Wang, and H. Zhang. "Incident Management Integration Tool: Dynamically Predicting Incident Durations, Secondary Incident Occurrence and Incident Delays." *Intelligent Transport Systems IET* 6 (2), (2012): 204-214.
- Lao, Y., G. Zhang, J. Corey, Y. Wang. "Gaussian Mixture Model-Based Speed Estimation and Vehicle Classification Using Single-Loop Measurements" *Journal of Intelligent Transportation Systems* 16 (4), (2012): 184-196.
- Moore, J.E., G. Giuliano, and S. Cho. "Secondary Accident Rates on Los Angeles Freeways." *Journal of Transportation Engineering* 130 (3), (2004): 280-285.
- Owens, N., A. Armstrong, P. Sullivan, C. Mitchell, D. Newton, R. Brewster, and T. Trego. *Traffic Incident Management Handbook*. FHWA-HOP-10-013, 2010.
- Park, H., X. Zhang, and A. Haghani. "ATIS: Interpretation of Bayesian Neural Network for predicting the duration of detected incidents." *The 92nd Annual Meeting of Transportation Research Board*. Paper #13-1214. Washington, D.C., 2013. Presented.
- Payne, H.J. and S.C. Tignor. "Freeway Incident Detection Algorithms Based on Decision Trees with States." *Transportation Research Record: Journal of the Transportation Research Board* 682, (1978): 30-37.
- Pushkar, A., F.L. Hall, and J.A. Acha-Daza. "Estimation of Speeds from Single-Loop Freeway Flow and Occupancy Data Using Cusp Catastrophe Theory Model." *Transportation Research Record: Journal of the Transportation Research Board* 1457, (1994): 149-157.
- Raub, R. "Occurrence of Secondary Crashes on Urban Arterial Roadways." *Transportation Research Record: Journal of the Transportation Research Board* 1581, (1997): 53-58.
- Schönhof, M. and, D. Helbing. "Criticism of Three-phase Traffic Theory." *Transportation Research Part B* 43 (2009): 784-797
- Sun, C. and V. Chilukuri. "Dynamic Incident Progression Curve for Classifying Secondary Traffic Crashes." *Journal of Transportation Engineering* 136 (12), (2010): 1153-1158.
- Texas Transportation Institute. *Urban Mobility Report 2011*. College Station, Texas, 2003.
- Tukey, J.W. "Exploratory Data Analysis." *Addison-Wesley*, Reading, Massachusetts, (1977): 39-49.
- Vlahogianni, E.I., M.G. Karlaftis, J. Golias, and B. Halkias. "Freeway Operations, Spatiotemporal Incident Characteristics and Secondary Crash Occurrence." *Transportation Research Record: Journal of the Transportation Research Board* 2178, (2010): 1-9.
- Vlahogianni, E.I., M.G. Karlaftis, and F.P. Orfanou. "Modeling the Effects of Weather and Traffic on the Risk of Secondary Incidents." *Journal of Intelligent Transportation Systems: Technology, Planning, and Operations* 16 (3), (2012): 109-117.
- Washington, S., M. Karlaftis, F. Mannering. "Statistical and Econometric Methods for Transportation Data Analysis". *Chapman and Hall/CRC Press* (2003).
- Zhan, C., L. Shen, M. Hadi, and A. Gan. "Understanding the Characteristic of Secondary Crashes on Freeways." *The 87th Annual Meeting of Transportation Research Board* (CD-ROM), Washington, D.C., 2008.
- Zhan, C., A. Gan., and M.A. Hadi. "Identifying Secondary Crashes and Their Contributing Factors." *Transportation Research Record: Journal of the Transportation Research Board* 2102, (2009): 68-75.

Zhang, H. and A. Khattak, "What Is the Role of Multiple Secondary Incidents in Traffic Operations?" *Journal of Transportation Engineering* 136 (11) (2010): 12.

Zhang, H. and A. Khattak, "Spatiotemporal Patterns of Primary and Secondary Incidents on Urban Freeways." *Transportation Research Record: Journal of the Transportation Research Board* 2229, (2011): 19-27.